

2020

TRAILERING GUIDE



WE'VE GENERATED QUITE A FOLLOWING



Every GMC is a reminder that the same passion and purpose that drive you also drive us. Together, we're setting our own standards and proving that Professional Grade isn't merely a label, it's a way of life. What follows are the capabilities of the entire GMC lineup that make us all pros.

This guide will help you select the GMC model that's right for your trailering needs. It also contains helpful tips for loading, driving and parking with your trailer.

Pro tip: Hover over key words to reveal hyperlinks. Clicking these will allow you to quickly navigate through the guide.

TABLE OF CONTENTS

| | | | |
|--|----|--|----|
| MAXIMUM TRAILER WEIGHT RATING | 1 | TERRAIN | 32 |
| SIERRA HEAVY DUTY | 2 | OVERVIEW | 33 |
| OVERVIEW | 3 | TRAILERING CAPABILITY AND POWERTRAIN SPECIFICATIONS | 34 |
| TRAILERING CAPABILITY | 4 | VEHICLE DIMENSIONS | 35 |
| TRAILERING CAPABILITY (10,000-LB GVWR OR LESS) | 5 | SAVANA | 36 |
| POWERTRAIN SPECIFICATIONS | 6 | CARGO VAN OVERVIEW | 37 |
| VEHICLE DIMENSIONS | 7 | CARGO VAN TRAILERING CAPABILITY | 38 |
| CHASSIS CAB OVERVIEW | 8 | PASSENGER VAN OVERVIEW | 39 |
| CHASSIS CAB TRAILERING CAPABILITY | 9 | PASSENGER VAN TRAILERING CAPABILITY | 40 |
| CHASSIS CAB VEHICLE DIMENSIONS | 10 | CARGO/PASSENGER VANS POWERTRAIN SPECIFICATIONS | 41 |
| SIERRA 1500 | 11 | CUTAWAY OVERVIEW | 42 |
| OVERVIEW | 12 | CUTAWAY TRAILERING CAPABILITY | 43 |
| TRAILERING CAPABILITY | 13 | CUTAWAY POWERTRAIN SPECIFICATIONS | 44 |
| POWERTRAIN SPECIFICATIONS | 15 | VEHICLE DIMENSIONS | 45 |
| VEHICLE DIMENSIONS | 16 | TRAILERING TECHNOLOGY | 46 |
| CANYON | 17 | CAMERA SYSTEM | 47 |
| OVERVIEW | 18 | HIGHLIGHTS | 48 |
| TRAILERING CAPABILITY | 19 | AVAILABILITY | 49 |
| POWERTRAIN SPECIFICATIONS | 20 | TRAILERING TERMINOLOGY | 50 |
| VEHICLE DIMENSIONS | 21 | TRAILER HITCH TYPES | 51 |
| YUKON AND YUKON XL | 22 | TRAILER TYPES | 52 |
| OVERVIEW | 23 | TRAILERING INFORMATION LABEL | 53 |
| TRAILERING CAPABILITY | 24 | | |
| POWERTRAIN SPECIFICATIONS | 25 | | |
| VEHICLE DIMENSIONS | 26 | | |
| ACADIA | 27 | | |
| OVERVIEW | 28 | | |
| TRAILERING CAPABILITY | 29 | | |
| POWERTRAIN SPECIFICATIONS | 30 | | |
| VEHICLE DIMENSIONS | 31 | | |

VEHICLE COMPARISON

MAXIMUM TRAILER WEIGHT RATING (LBS)¹

GMC | 1



This chart gives you an idea of the maximum amount of weight you can confidently trailer with different GMC model lines when your vehicle is properly equipped. When determining the total weight of trailer and cargo, include the weight of any additional passengers and optional equipment. See the following towing-capability pages for maximum trailer weight ratings by specific model.

¹Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²35,500-lb rating requires a properly equipped 3500 HD Regular Cab long bed DRW 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and gooseneck hitch. ³18,510-lb rating requires a properly equipped 2500 HD Regular Cab long bed 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and fifth-wheel or gooseneck hitch. ⁴Sierra's 12,100-lb rating requires a properly equipped Sierra SLT Double Cab 4WD model with available 6.2L V8 engine and Max Trailering Package. ⁵10,000-lb rating requires a properly equipped Savana Cargo Van model with available 6.0L V8 engine and Trailering Equipment Package. ⁶Requires 2WD model with available Heavy-Duty Trailering Package. ⁷7,700-lb rating requires 2WD Canyon SLE Crew Cab model with available Duramax 2.8L I4 Diesel engine, Driver Alert Package, SLE Convenience Package, automatic locking rear differential and Trailering Package. ⁸Requires available 3.6L V6 engine and Trailering Package. ⁹Requires available 2.0L engine and trailering equipment.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA

TERRAIN

GMC | 2

2020 SIERRA HEAVY DUTY



OVERVIEW

NEXT GENERATION SIERRA HEAVY DUTY

GMC | 3



KEY TRAILERING FEATURES

- HEAVY-DUTY TRAILERING, UP TO 35,500 LBS¹ (MAX TRAILERING AS SHOWN 21,300 LBS²)
- FIRST HEAVY-DUTY PICKUP IN ITS CLASS WITH AN AVAILABLE ALLISON® 10-SPEED AUTOMATIC TRANSMISSION
- UP TO 15 AVAILABLE CAMERA VIEWS³, INCLUDING INDUSTRY-FIRST TRANSPARENT TRAILER VIEW
- AVAILABLE PROGRADE™ TRAILERING SYSTEM WITH IN-VEHICLE TRAILERING APP⁴
- AVAILABLE TRACTION SELECT SYSTEM WITH TOW/Haul MODE
- SMART TRAILER INTEGRATION
- AVAILABLE HEAD-UP DISPLAY AND REAR CAMERA MIRROR⁵
- AVAILABLE WORLD'S FIRST SIX-FUNCTION GMC MULTIPRO™ TAILGATE

KEY SPECIFICATIONS

- MAXIMUM GOOSENECK TRAILERING 35,500 LBS¹
- MAXIMUM FIFTH-WHEEL TRAILERING 32,000 LBS⁶
- MAXIMUM CONVENTIONAL TRAILERING 20,000 LBS⁷
- MAXIMUM HORSEPOWER 445⁸
- MAXIMUM TORQUE 910 LB-FT⁸
- MAXIMUM PAYLOAD 7,442 LBS⁹
- MAXIMUM CARGO BED VOLUME 83.5 CU. FT.¹⁰
- 12 CARGO TIE-DOWNS RATED AT 500 LBS¹¹ PER CORNER
- MAXIMUM SEATING CAPACITY OF SIX¹²

POWERTRAIN

- AVAILABLE 6.6L DURAMAX TURBO DIESEL V8 PAIRED WITH AN ALLISON 10-SPEED AUTOMATIC TRANSMISSION
- ALL-NEW 6.6L GAS V8 ENGINE PAIRED WITH 6L90 6-SPEED AUTOMATIC TRANSMISSION

¹35,500-lb rating requires properly equipped 3500 HD Regular Cab long bed DRW 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and gooseneck hitch. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Requires properly equipped 3500 HD Crew Cab SRW standard bed 4WD model with available 6.6L Duramax Turbo Diesel and fifth-wheel or gooseneck hitch. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³Read the vehicle Owner's Manual for important feature limitations and information. Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details. ⁴App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. ⁵Read the vehicle Owner's Manual for important feature limitations and information. ⁶32,000-lb rating requires properly equipped 3500 HD Regular Cab long bed DRW 2WD model equipped with available 6.6L Duramax Turbo Diesel engine and fifth-wheel hitch. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁷Requires properly equipped 3500 HD Crew Cab model with available 6.6L Duramax Turbo Diesel engine. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁸Requires available 6.6L Duramax Turbo Diesel engine. ⁹Requires properly equipped 3500 HD Regular Cab DRW long bed 2WD model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ¹⁰Requires long bed model. Cargo and load capacity limited by weight and distribution. ¹¹Cargo and load capacity limited by weight and distribution. ¹²Requires Double Cab or Crew Cab model with front 40/20/40 bench seat.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA

TERRAIN

TRAILERING CAPABILITY

NEXT GENERATION SIERRA HEAVY DUTY

GMC | 4

DURAMAX TURBO DIESEL SPECIFICATIONS

| Model | Cab | Bed | Max GCWR (lbs) ¹ | Max Conventional Hitch (lbs) ² | Max Fifth-Wheel Hitch (lbs) ² | Max Gooseneck Hitch (lbs) ² | Max Payload (lbs) ³ |
|----------|------------|----------|-----------------------------|---|--|--|--------------------------------|
| 2500 | Reg 2WD | Long | 26,000 | 14,500 | 18,510 | 18,510 | 3,715 |
| | Reg 4WD | Long | 26,000 | 14,500 | 18,190 | 18,190 | 3,650 |
| | Double 2WD | Standard | 26,000 | 14,500 | 18,200 | 18,200 | 3,561 |
| | Double 4WD | Standard | 26,000 | 14,500 | 17,890 | 17,890 | 3,546 |
| | Double 2WD | Long | 26,000 | 14,500 | 18,040 | 18,040 | 3,595 |
| | Double 4WD | Long | 26,000 | 14,500 | 17,750 | 17,750 | 3,657 |
| | Crew 2WD | Standard | 27,500 | 18,500 | 18,500 | 18,500 | 3,553 |
| | Crew 4WD | Standard | 27,500 | 18,500 | 18,500 | 18,500 | 3,563 |
| | Crew 2WD | Long | 27,500 | 18,500 | 18,500 | 18,500 | 3,536 |
| | Crew 4WD | Long | 27,500 | 18,500 | 18,500 | 18,500 | 3,597 |
| 3500 SRW | Reg 2WD | Long | 29,700 | 14,500 | 21,500 | 21,500 | 4,215 |
| | Reg 4WD | Long | 29,700 | 14,500 | 21,500 | 21,500 | 4,217 |
| | Double 2WD | Long | 29,700 | 14,500 | 21,490 | 21,490 | 4,130 |
| | Double 4WD | Long | 29,700 | 14,500 | 21,210 | 21,210 | 4,148 |
| | Crew 2WD | Standard | 29,700 | 20,000 | 21,500 | 21,500 | 4,135 |
| | Crew 4WD | Standard | 29,700 | 20,000 | 21,300 | 21,300 | 4,185 |
| | Crew 2WD | Long | 29,700 | 20,000 | 21,330 | 21,330 | 4,013 |
| | Crew 4WD | Long | 29,700 | 20,000 | 21,040 | 21,040 | 4,078 |
| 3500 DRW | Reg 2WD | Long | 43,500 | 20,000 | 32,000 | 35,500 | 6,532 |
| | Reg 4WD | Long | 40,000 | 20,000 | 31,760 | 31,760 | 6,196 |
| | Double 2WD | Long | 40,000 | 20,000 | 31,500 | 31,500 | 6,059 |
| | Double 4WD | Long | 40,000 | 20,000 | 31,340 | 31,340 | 5,777 |
| | Crew 2WD | Long | 40,000 | 20,000 | 31,400 | 31,400 | 5,892 |
| | Crew 4WD | Long | 40,000 | 20,000 | 31,180 | 31,180 | 5,607 |

GAS ENGINE SPECIFICATIONS

| Model | Cab | Bed | Max GCWR (lbs) ¹ | Max Conventional Hitch (lbs) ² | Max Fifth-Wheel Hitch (lbs) ² | Max Gooseneck Hitch (lbs) ² | Max Payload (lbs) ³ |
|----------|------------|----------|-----------------------------|---|--|--|--------------------------------|
| 2500 | Reg 2WD | Long | 24,000 | 14,500 | 17,370 | 17,370 | 3,979 |
| | Reg 4WD | Long | 24,000 | 14,500 | 17,060 | 17,060 | 3,965 |
| | Double 2WD | Standard | 24,000 | 14,500 | 17,050 | 17,050 | 3,762 |
| | Double 4WD | Standard | 24,000 | 14,500 | 16,740 | 16,740 | 3,747 |
| | Double 2WD | Long | 24,000 | 14,500 | 16,930 | 16,930 | 3,792 |
| | Double 4WD | Long | 24,000 | 14,500 | 16,650 | 16,650 | 3,854 |
| | Crew 2WD | Standard | 24,000 | 14,500 | 16,940 | 16,940 | 3,751 |
| | Crew 4WD | Standard | 24,000 | 14,500 | 16,650 | 16,650 | 3,760 |
| | Crew 2WD | Long | 24,000 | 14,500 | 16,840 | 16,840 | 3,800 |
| | Crew 4WD | Long | 24,000 | 14,500 | 16,550 | 16,550 | 3,862 |
| 3500 SRW | Reg 2WD | Long | 24,000 | 14,500 | 17,200 | 17,200 | 4,481 |
| | Reg 4WD | Long | 24,000 | 14,500 | 16,950 | 16,950 | 4,534 |
| | Double 2WD | Long | 24,000 | 14,500 | 16,700 | 16,700 | 4,373 |
| | Double 4WD | Long | 24,000 | 14,500 | 16,500 | 16,500 | 4,391 |
| | Crew 2WD | Standard | 24,000 | 14,500 | 16,700 | 16,700 | 4,316 |
| | Crew 4WD | Standard | 24,000 | 14,500 | 16,530 | 16,530 | 4,365 |
| | Crew 2WD | Long | 24,000 | 14,500 | 16,700 | 16,700 | 4,333 |
| | Crew 4WD | Long | 24,000 | 14,500 | 16,410 | 16,410 | 4,398 |
| 3500 DRW | Reg 2WD | Long | 24,000 | 16,800 | 16,800 | 16,800 | 7,442 |
| | Reg 4WD | Long | 24,000 | 16,800 | 16,710 | 16,710 | 7,145 |
| | Double 2WD | Long | 24,000 | 16,400 | 16,400 | 16,400 | 6,985 |
| | Double 4WD | Long | 24,000 | 16,390 | 16,270 | 16,270 | 6,703 |
| | Crew 2WD | Long | 24,000 | 16,300 | 16,200 | 16,200 | 6,894 |
| | Crew 4WD | Long | 24,000 | 16,300 | 16,180 | 16,180 | 6,610 |

¹Gross Combination Weight Rating (GCWR) when properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ²Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.

SMALL BUSINESS OWNERS AND COMMERCIAL DRIVERS: [CLICK HERE FOR CHASSIS AND DE-RATED 2500 OPTIONS.](#)



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA

TERRAIN

TRAILERING CAPABILITY (10,000-LB GVWR OR LESS)

NEXT GENERATION SIERRA HEAVY DUTY

GMC | 5

| SPECIFICATIONS | | | | | | | | |
|-------------------------------------|---------------------------------|----------|-----------------------------|--|---|--|--|--------------------------------|
| Model | Cab | Bed | Max GVWR (lbs) ¹ | Max GCWR ² (lbs) ² | Max Conventional Hitch (lbs) ³ | Max Fifth-Wheel Hitch (lbs) ³ | Max Gooseneck Hitch (lbs) ³ | Max Payload (lbs) ⁴ |
| 6.6L V8 Duramax Turbo Diesel | | | | | | | | |
| 2500 | Double 4WD | Standard | 10,000 | 24,500 | 14,500 | 12,610 | 12,610 | 2,375 |
| 2500 | Double 4WD | Long | 10,000 | 24,500 | 14,500 | 11,690 | 11,690 | 2,236 |
| 2500 | Crew 4WD with 17" wheels | Standard | 10,000 | 26,000 | 14,500 | 11,720 | 11,720 | 2,241 |
| 2500 | Crew 4WD with 18" or 20" wheels | Standard | 10,000 | 26,000 | 17,850 | 11,530 | 11,530 | 2,213 |
| 2500 | Crew 2WD with 17" wheels | Long | 10,000 | 26,000 | 14,500 | 12,550 | 12,550 | 2,365 |
| 2500 | Crew 2WD with 18" or 20" wheels | Long | 10,000 | 26,000 | 17,970 | 12,350 | 12,350 | 2,336 |
| 2500 | Crew 4WD with 17" wheels | Long | 10,000 | 26,000 | 14,500 | 10,620 | 10,620 | 2,076 |
| 2500 | Crew 4WD with 18" or 20" wheels | Long | 10,000 | 26,000 | 16,560 | 10,240 | 10,240 | 2,047 |
| 6.6L Gas V8 Engine | | | | | | | | |
| 2500 | Regular 2WD | Long | 9,900 | 24,000 | 14,500 | 17,370 | 17,370 | 3,757 |
| 2500 | Regular 4WD | Long | 10,000 | 24,000 | 14,500 | 17,060 | 17,060 | 3,544 |
| 2500 | Double 2WD | Standard | 10,000 | 24,000 | 14,500 | 17,050 | 17,050 | 3,541 |
| 2500 | Double 4WD | Standard | 10,000 | 24,000 | 14,500 | 16,740 | 16,740 | 3,226 |
| 2500 | Double 2WD | Long | 10,000 | 24,000 | 14,500 | 16,930 | 16,930 | 3,420 |
| 2500 | Double 4WD | Long | 10,000 | 24,000 | 14,500 | 16,650 | 16,650 | 3,133 |
| 2500 | Crew 2WD | Standard | 10,000 | 24,000 | 14,500 | 16,940 | 16,940 | 3,429 |
| 2500 | Crew 4WD | Standard | 10,000 | 24,000 | 14,500 | 16,650 | 16,650 | 3,139 |
| 2500 | Crew 2WD | Long | 10,000 | 24,000 | 14,500 | 16,840 | 16,840 | 3,329 |
| 2500 | Crew 4WD | Long | 10,000 | 24,000 | 14,500 | 16,550 | 16,550 | 3,040 |

The Gross Vehicle Weight Rating (GVWR) and Gross Combined Weight Rating (GCWR) of the Sierra Heavy Duty have increased for 2020. For small businesses and commercial buyers, this change has potential implications for registering your truck.

- Trucks over 10,000 lbs GVWR require a Department of Transportation number.
- Drivers of trucks over 26,000 lbs GCWR also require a Commercial Driver's License.

Contact the U.S. Department of Transportation and your local Department of Transportation to determine whether you may have additional registration or licensing requirements for these trucks.

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR) when properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

NEXT GENERATION SIERRA HEAVY DUTY

GMC | 6



ENGINE SPECIFICATIONS

| Engine | Bore & Stroke (in./mm) | Block Material | Cylinder Head Material | Compression Ratio | Valvetrain | Fuel Delivery | Horsepower | Torque |
|----------------------|---------------------------|---------------------------------------|------------------------|-------------------|--|-----------------------------------|------------|------------|
| 6.6L V8 Turbo Diesel | 4.05 x 3.89 / 103 x 99 | Cast iron | Cast aluminum | 16 : 1 | Overhead valve, four valves per cylinder | Common-rail direct fuel injection | 445 @ 2800 | 910 @ 1600 |
| 6.6L Gas V8 | 4.06 x 3.86 / 103.25 x 98 | Cast iron with nodular iron main caps | Cast aluminum | 10.75 : 1 | Overhead valve, two valves per cylinder, Variable Valve Timing | Direct fuel injection | 401 @ 5200 | 464 @ 4000 |

TRANSMISSION SPECIFICATIONS

| Transmission Type | Gear Ratios (:1) | First | Second | Third | Fourth | Fifth | Sixth | Seventh | Eighth | Ninth | Tenth | Reverse | Final Drive Ratio |
|--|------------------|-------|--------|-------|--------|-------|-------|---------|--------|-------|-------|---------|--------------------------|
| Allison 10-speed automatic (6.6L Turbo Diesel) | 10L1000 | 4.54 | 2.87 | 2.06 | 1.72 | 1.48 | 1.26 | 1.00 | 0.85 | 0.69 | 0.63 | 4.54 | 3.42 (6.6L Turbo Diesel) |
| 6L90 6-speed automatic (6.6L gas V8) | 6L90 | 4.03 | 2.36 | 1.53 | 1.15 | 0.85 | 0.67 | – | – | – | – | 3.06 | 3.73 (6.6L gas V8) |



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA


TERRAIN

VEHICLE DIMENSIONS

NEXT GENERATION SIERRA HEAVY DUTY

SELECT SIERRA 2500 HEAVY DUTY CAB DIMENSIONS


CREW CAB

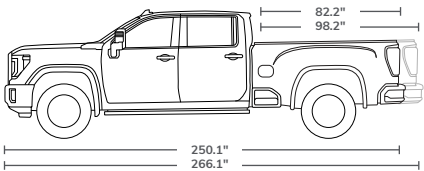

Sierra 2500 Heavy Duty comes in 2WD and 4WD Crew Cab models with a 6' 9" standard bed or available 8' long bed.

| | |
|------------------------|--------------------------------|
| INSIDE BED HEIGHT | 21" |
| WHEELBASE | 158.9"-172" |
| FRONT/REAR TREAD WIDTH | 68.1"/68.3" |
| GROUND CLEARANCE | 10.1" |
| CARGO VOLUME | 69.6-83.5 cu. ft. ¹ |


DOUBLE CAB

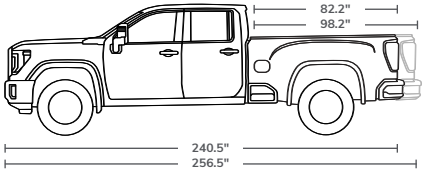

Sierra 2500 Heavy Duty comes in 2WD and 4WD Double Cab models with a 6' 9" standard bed or available 8' long bed.

| | |
|------------------------|--------------------------------|
| INSIDE BED HEIGHT | 21" |
| WHEELBASE | 149.4"-162.5" |
| FRONT/REAR TREAD WIDTH | 68.1"/68.3" |
| GROUND CLEARANCE | 10.2" |
| CARGO VOLUME | 69.6-83.5 cu. ft. ¹ |

REGULAR CAB

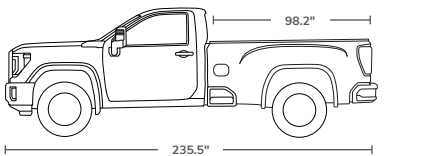


Sierra 2500 Heavy Duty comes in 2WD and 4WD Regular Cab models with an 8' long bed.

| | |
|------------------------|---------------------------|
| INSIDE BED HEIGHT | 21" |
| WHEELBASE | 141.6" |
| FRONT/REAR TREAD WIDTH | 68.1"/68.3" |
| GROUND CLEARANCE | 10.2" |
| CARGO VOLUME | 83.5 cu. ft. ¹ |

¹Cargo and load capacity limited by weight and distribution.

SELECT SIERRA 3500 HEAVY DUTY CAB DIMENSIONS


CREW CAB

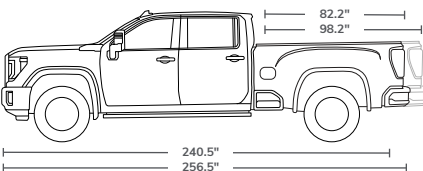

Sierra 3500 Heavy Duty comes in 2WD and 4WD Crew Cab models with either a 6' 9" standard bed or available 8' long bed. Long bed is available with a SRW or DRW configuration.

| | |
|------------------------|------------------------------------|
| INSIDE BED HEIGHT | 21" |
| WHEELBASE | 158.9"-172" |
| FRONT/REAR TREAD WIDTH | SRW: 68.1"/68.3" DRW: 68.5"/75" |
| GROUND CLEARANCE | SRW: 11.1"-11.2" DRW: 10.4" |
| CARGO VOLUME | 69.6-83.5 cu. ft. ¹ |


DOUBLE CAB

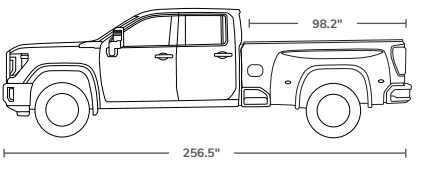

Sierra 3500 Heavy Duty comes in 2WD and 4WD Double Cab models with an 8' long bed SRW or DRW configuration.

| | |
|------------------------|------------------------------------|
| INSIDE BED HEIGHT | 21" |
| WHEELBASE | 162.5" |
| FRONT/REAR TREAD WIDTH | SRW: 68.1"/68.3" DRW: 68.5"/75" |
| GROUND CLEARANCE | SRW: 11.2" DRW: 10.4" |
| CARGO VOLUME | 83.5 cu. ft. ¹ |

REGULAR CAB

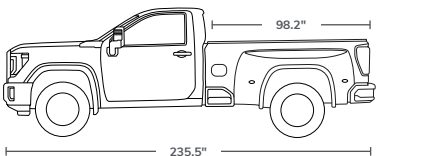

Sierra 3500 Heavy Duty comes in 2WD and 4WD Regular Cab models with an 8' long bed SRW or DRW configuration.

| | |
|------------------------|------------------------------------|
| INSIDE BED HEIGHT | 21" |
| WHEELBASE | 141.6" |
| FRONT/REAR TREAD WIDTH | SRW: 68.1"/68.3" DRW: 68.5"/75" |
| GROUND CLEARANCE | SRW: 11.2" DRW: 10.5" |
| CARGO VOLUME | 83.5 cu. ft. ¹ |



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

OVERVIEW

NEXT GENERATION 2020 SIERRA HEAVY DUTY CHASSIS CAB

GMC | 8



KEY FEATURES

- STANDARD TRAILERING MIRRORS
- ELECTRIC PARKING BRAKE
- NEW PARK GRADE HOLD ASSIST
- AVAILABLE INTEGRATED TRAILER BRAKE CONTROLLER
- HILL START ASSIST

AVAILABLE CUSTOM UPFITS

- DUMP TRUCK
- FLAT BED
- UTILITY/SERVICE BODY
- PLATFORM/STAKE BODY
- SNOWPLOW/SPREADER
- AMBULANCE/RESCUE

KEY SPECIFICATIONS

- MAXIMUM HORSEPOWER 445¹
- MAXIMUM TORQUE 910 LB-FT¹
- MAXIMUM PAYLOAD 7,571 LBS²
- MAXIMUM GVWR 14,000 LBS³
- MAXIMUM GCWR 40,000 LBS⁴
- MAXIMUM FUEL TANK CAPACITY 63.5 GALLONS (APPROX.)

POWERTRAIN

- AVAILABLE 6.6L DURAMAX TURBO DIESEL V8 PAIRED WITH AN ALLISON 10-SPEED AUTOMATIC TRANSMISSION
- ALL-NEW STANDARD 6.6L GAS V8 ENGINE WITH HYDRA-MATIC 6L90 6-SPEED AUTOMATIC TRANSMISSION

¹Requires available 6.6L Duramax Turbo Diesel engine. ²Requires properly equipped 2WD Regular Cab DRW (60" CA) model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ³Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ⁴40,000-lb GCWR requires available 6.6L Duramax Turbo Diesel engine. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

NEXT GENERATION SIERRA HEAVY DUTY CHASSIS CAB

GMC | 9

SPECIFICATIONS

| Cab | Model | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio (lbs) | Max Payload (lbs) ³ |
|---------|--|-----------------------------|-----------------------------|------------------|--------------------------------|
| Regular | 6.6L Gas V8 | | | | |
| | 2WD Regular Cab Dual Rear Wheel (60" CA) | 14,000 | 24,000 | 3.73 | 7,571 |
| | 4WD Regular Cab Dual Rear Wheel (60" CA) | 14,000 | 24,000 | 3.73 | 7,204 |
| | 2WD Regular Cab Dual Rear Wheel (84" CA) | 14,000 | 24,000 | 3.73 | 7,454 |
| | 4WD Regular Cab Dual Rear Wheel (84" CA) | 14,000 | 24,000 | 3.73 | 7,159 |
| | 6.6L Duramax Turbo Diesel V8 | | | | |
| | 2WD Regular Cab Dual Rear Wheel (60" CA) | 14,000 | 40,000 | 3.42 | 6,638 |
| | 4WD Regular Cab Dual Rear Wheel (60" CA) | 14,000 | 40,000 | 3.42 | 6,271 |
| | 2WD Regular Cab Dual Rear Wheel (84" CA) | 14,000 | 40,000 | 3.42 | 6,516 |
| | 4WD Regular Cab Dual Rear Wheel (84" CA) | 14,000 | 40,000 | 3.42 | 6,221 |
| Crew | 6.6L Gas V8 | | | | |
| | 2WD Crew Cab Dual Rear Wheel (60" CA) | 14,000 | 24,000 | 3.73 | 7,040 |
| | 4WD Crew Cab Dual Rear Wheel (60" CA) | 14,000 | 24,000 | 3.73 | 6,713 |
| | 6.6L Duramax Turbo Diesel V8 | | | | |
| | 2WD Crew Cab Dual Rear Wheel (60" CA) | 14,000 | 40,000 | 3.42 | 6,078 |
| | 4WD Crew Cab Dual Rear Wheel (60" CA) | 14,000 | 40,000 | 3.42 | 5,751 |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA


TERRAIN

VEHICLE DIMENSIONS

NEXT GENERATION
SIERRA HEAVY DUTY CHASSIS CAB

SIERRA CHASSIS CAB VEHICLE DIMENSIONS

SIERRA CHASSIS CAB REGULAR CAB

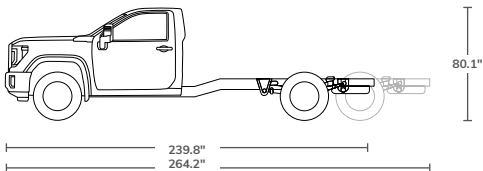


Sierra 3500 HD Chassis Cab allows you to choose from Regular and Crew Cab options.

| MAX PAYLOAD | MAX GCWR | MAX GVWR |
|-------------------------------------|-------------------------|-------------------------|
| Regular Cab: 7,571 lbs ¹ | 40,000 lbs ³ | 14,000 lbs ⁴ |
| Crew Cab: 7,040 lbs ² | | |

¹Requires properly equipped 2WD Regular Cab DRW (60" CA) model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ²Requires properly equipped 2WD Crew Cab DRW model with 6.6L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ³40,000-lb GCWR requires available 6.6L Duramax Turbo Diesel engine. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ⁴Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment.

SIERRA CHASSIS CAB CREW CAB

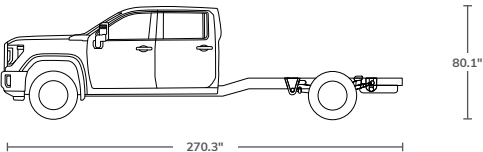

VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 11

2020 SIERRA 1500



OVERVIEW

SIERRA 1500



KEY TRAILERING FEATURES

- UP TO 15 CAMERA VIEWS¹ ARE AVAILABLE
- AVAILABLE GMC PROGRADE TRAILERING SYSTEM WITH IN-VEHICLE TRAILERING APP²
- SMART TRAILER INTEGRATION
- AVAILABLE TRACTION SELECT SYSTEM WITH TOW/Haul MODE
- MULTICOLOR 15" DIAGONAL HEAD-UP DISPLAY IS AVAILABLE
- AVAILABLE WORLD'S FIRST SIX-FUNCTION GMC MULTIPRO TAILGATE

KEY SPECIFICATIONS

- MAXIMUM CONVENTIONAL TRAILERING 12,100 LBS³
- MAXIMUM HORSEPOWER 420⁴
- MAXIMUM TORQUE 460 LB-FT⁴
- MAXIMUM PAYLOAD 2,240 LBS⁵
- MAXIMUM SEATING CAPACITY OF SIX⁶
- MAXIMUM CREW CAB CARGO VOLUME 71.7 CU. FT.⁷

POWERTRAINS

- AVAILABLE 6.2L V8 WITH 10-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 3.0L TURBO DIESEL WITH 10-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 5.3L V8 WITH 8-SPEED (2WD) OR 10-SPEED (4WD) AUTOMATIC TRANSMISSION
- AVAILABLE 2.7L TURBO WITH 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 5.3L V8 WITH 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 WITH 6-SPEED AUTOMATIC TRANSMISSION

¹Read the vehicle Owner's Manual for important feature limitations and information. Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details. ²App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. ³12,100-lb rating requires properly equipped Double Cab 4WD model with available 6.2L V8 engine and Max Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴Requires available 6.2L V8 engine. ⁵Requires properly equipped Regular Cab long bed 2WD model with 4.3L V6 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁶Requires Double Cab or Crew Cab model with front 40/20/40 bench seat. ⁷Requires standard bed model. Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

SIERRA 1500

GMC | 13

SPECIFICATIONS

| Engine | Cab | Bed | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio | Max Conventional Hitch (lbs) ³ | Max Fifth-Wheel Hitch (lbs) ³ | Max Gooseneck Hitch (lbs) ³ | Max Payload (lbs) ⁴ |
|--|-------------|----------|--------------------------------|--------------------------------|------------|---|--|--|-----------------------------------|
| 4.3L EcoTec3 V6 | Crew 2WD | Short | 6,800 | 12,800 | 3.42 | 7,700 | 7,600 | 7,600 | 2,030 |
| | Crew 4WD | Short | 7,000 | 12,800 | 3.42 | 7,500 | 7,400 | 7,400 | 2,010 |
| | Crew 2WD | Standard | 6,800 | 12,800 | 3.42 | 7,600 | 7,500 | 7,500 | 1,950 |
| | Crew 4WD | Standard | 7,000 | 12,800 | 3.42 | 7,400 | 7,300 | 7,300 | 1,960 |
| | Double 2WD | Standard | 6,800 | 12,800 | 3.42 | 7,700 | 7,600 | 7,600 | 2,030 |
| | Double 4WD | Standard | 7,000 | 12,800 | 3.42 | 7,500 | 7,400 | 7,400 | 2,020 |
| | Regular 2WD | Long | 6,800 | 12,800 | 3.42 | 7,900 | 7,800 | 7,800 | 2,240 |
| | Regular 4WD | Long | 6,900 | 12,800 | 3.42 | 7,700 | 7,600 | 7,600 | 2,120 |
| 2.7L Turbo | Crew 2WD | Short | 6,900 | 12,000 | 3.42 | 6,800 | 6,800 | 6,800 | 2,060 |
| | Crew 4WD | Short | 7,000 | 12,000 | 3.42 | 6,600 | 6,600 | 6,600 | 2,030 |
| | Crew 2WD | Standard | 6,800 | 12,000 | 3.42 | 6,800 | 6,700 | 6,700 | 1,980 |
| | Crew 4WD | Standard | 7,000 | 12,000 | 3.42 | 6,600 | 6,500 | 6,500 | 1,990 |
| | Double 2WD | Standard | 6,800 | 12,000 | 3.42 | 6,900 | 6,800 | 6,800 | 2,060 |
| | Double 4WD | Standard | 7,000 | 12,000 | 3.42 | 6,700 | 6,600 | 6,600 | 2,040 |
| 5.3L EcoTec3 V8 (Base Sierra trim only) | Crew 2WD | Short | 6,900 | 15,000 | 3.42 | 9,800 | 9,700 | 9,700 | 2,060 |
| | Crew 4WD | Short | 7,100 | 15,000 | 3.42 | 9,600 | 9,500 | 9,500 | 2,040 |
| | Crew 2WD | Standard | 6,900 | 15,000 | 3.42 | 9,700 | 9,700 | 9,700 | 1,990 |
| | Crew 4WD | Standard | 7,100 | 15,000 | 3.42 | 9,500 | 9,500 | 9,500 | 1,990 |
| | Double 2WD | Standard | 6,800 | 15,000 | 3.42 | 9,800 | 9,700 | 9,700 | 1,960 |
| | Double 4WD | Standard | 7,000 | 15,000 | 3.42 | 9,600 | 9,500 | 9,500 | 1,950 |
| | Regular 2WD | Long | 6,800 | 15,000 | 3.42 | 10,000 | 10,000 | 10,000 | 2,180 |
| | Regular 4WD | Long | 6,900 | 15,000 | 3.42 | 9,800 | 9,700 | 9,700 | 2,060 |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA

TERRAIN

TRAILERING CAPABILITY CONTINUED

SIERRA 1500

GMC | 14

SPECIFICATIONS

| Engine | Cab | Bed | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio | Max Conventional Hitch (lbs) ³ | Max Fifth-Wheel Hitch (lbs) ³ | Max Gooseneck Hitch (lbs) ³ | Max Payload (lbs) ⁴ |
|------------------------------|------------|----------|--------------------------------|--------------------------------|------------|---|--|--|-----------------------------------|
| 5.3L EcoTec3 V8 | Crew 2WD | Short | 7,100 ⁵ | 16,800 ⁵ | 3.23 | 9,600 | 9,100 | 9,100 | 2,140 ⁵ |
| | | | | | 3.42 | 11,300 ⁵ | 10,200 ⁵ | 10,200 ⁵ | |
| | Crew 4WD | Short | 7,300 ⁵ | 16,800 ⁵ | 3.23 | 9,200 ⁵ | 8,100 ⁷ | 8,100 ⁷ | 2,120 |
| | | | | | 3.42 | 11,100 ⁵ | 8,500 ⁵ | 8,500 ⁵ | |
| | Crew 2WD | Standard | 7,100 ⁵ | 16,800 ⁵ | 3.23 | 9,500 | 8,700 | 8,700 | 2,070 ⁵ |
| | | | | | 3.42 | 11,300 ⁵ | 9,800 ⁵ | 9,800 ⁵ | |
| | Crew 4WD | Standard | 7,300 ⁵ | 16,800 ⁵ | 3.23 | 9,200 | 7,800 | 7,800 | 2,080 ⁵ |
| | | | | | 3.42 | 11,000 ⁵ | 9,600 ⁵ | 9,600 ⁵ | |
| | Double 2WD | Standard | 7,100 ⁵ | 16,800 ⁵ | 3.23 | 9,600 | 8,700 | 8,700 | 2,170 ⁵ |
| | | | | | 3.42 | 11,300 ⁵ | 10,400 ⁵ | 10,400 ⁵ | |
| | Double 4WD | Standard | 7,300 ⁵ | 16,800 ⁵ | 3.23 | 9,300 | 8,300 | 8,300 | 2,150 ⁵ |
| | | | | | 3.42 | 11,100 ⁵ | 10,100 ⁵ | 10,100 ⁵ | |
| 6.2L EcoTec3 V8 | Crew 4WD | Short | 7,300 ⁵ | 17,800 ⁵ | 3.23 | 8,800 | 7,300 ⁸ | 7,300 ⁸ | 2,000 ⁵ |
| | | | | | 3.42 | 12,000 ⁵ | 9,800 ⁵ | 9,800 ⁵ | |
| | Crew 4WD | Standard | 7,300 ⁵ | 17,800 ⁵ | 3.23 | 9,000 | 7,000 ⁹ | 7,000 ⁹ | 1,950 ⁵ |
| | | | | | 3.42 | 12,000 ⁵ | 9,500 ⁵ | 9,500 ⁵ | |
| | Double 4WD | Standard | 7,300 ⁵ | 17,800 ⁵ | 3.23 | 9,300 | 7,400 | 7,400 | 2,070 ⁵ |
| | | | | | 3.42 | 12,100 ⁵ | 10,000 ⁵ | 10,000 ⁵ | |
| Duramax 3.0L Turbo Diesel I6 | Crew 2WD | Short | 7,000 | 15,000 | 3.23 | 7,400 | 7,300 | 7,300 | 1,830 |
| | Crew 4WD | Short | 7,200 | 15,000 | 3.23 | 9,000 | 7,000 | 7,000 | 1,810 |
| | Crew 2WD | Standard | 7,000 | 15,000 | 3.23 | 7,300 | 7,200 | 7,200 | 1,750 |
| | Crew 4WD | Standard | 7,200 | 15,000 | 3.23 | 9,000 | 6,900 | 6,900 | 1,760 |
| | Double 2WD | Standard | 6,900 | 15,000 | 3.23 | 7,400 | 7,300 | 7,300 | 1,750 |
| | Double 4WD | Standard | 7,100 | 15,000 | 3.23 | 9,100 | 7,000 | 7,000 | 1,740 |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁵Requires available Max Trailering Package. ⁶AT4 trailering capacity is 9,800 lbs. ⁷AT4 trailering capacity is 8,200 lbs. ⁸AT4 trailering capacity is 7,600 lbs. ⁹AT4 trailering capacity is 7,100 lbs.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA

TERRAIN

POWERTRAIN SPECIFICATIONS

SIERRA 1500

| ENGINE SPECIFICATIONS | | | | | | | | |
|-------------------------------------|---------------------------|----------------|------------------------|-------------------|---|---|------------|------------|
| Engine | Bore & Stroke (in./mm) | Block Material | Cylinder Head Material | Compression Ratio | Valvetrain | Fuel Delivery | Horsepower | Torque |
| 4.3L Gasoline V6 | 3.92 x 3.62 / 99.6 x 92 | Cast aluminum | Cast aluminum | 11.0:1 | Overhead valve, two valves per cylinder, Variable Valve Timing | Direct high-pressure fuel injection with Active Fuel Management | 285 @ 5300 | 305 @ 3900 |
| 2.7L I4 Turbo Gasoline | 3.63 x 4.01 / 92.25 x 102 | Cast aluminum | Cast aluminum | 10.0:1 | Dual-overhead camshafts, four valves per cylinder, tri-power valvetrain with continuouslyVariableValveTiming,variable valve lift and Active Fuel Management | Direct high-pressure fuel injection with Active Fuel Management | 310 @ 5600 | 348 @ 1500 |
| 5.3L Gasoline V8 (Base Sierra only) | 3.78 x 3.62 / 96 x 92 | Cast aluminum | Cast aluminum | 11.0:1 | Overhead valve, two valves per cylinder, Variable Valve Timing | Direct high-pressure fuel injection with Active Fuel Management | 355 @ 5600 | 383 @ 4100 |
| 5.3L Gasoline V8 | 3.78 x 3.62 / 96 x 92 | Cast aluminum | Cast aluminum | 11.0:1 | Overhead valve, two valves per cylinder, Variable Valve Timing | Direct high-pressure fuel injection with Dynamic Fuel Management | 355 @ 5600 | 383 @ 4100 |
| 6.2L Gasoline V8 | 4.06 x 3.62 / 103.25 x 92 | Cast aluminum | Cast aluminum | 11.5:1 | Overhead valve, two valves per cylinder, Variable Valve Timing | Direct high-pressure fuel injection with Dynamic Fuel Management | 420 @ 5600 | 460 @ 4100 |
| 3.0L I6 Turbo Diesel | 3.30 x 3.54 / 84 x 90 | Cast aluminum | Cast aluminum | 15.0:1 | Dual-overhead camshafts, four valves per cylinder | High-pressure, common-rail direct injection (36,250 psi/2,500 bar); electronic throttle valve | 277 @ 3750 | 460 @ 1500 |


| TRANSMISSION SPECIFICATIONS | | | | | | | | | | | | | |
|--|------------------|-------|--------|-------|--------|-------|-------|---------|--------|-------|-------|---------|---------------------------------------|
| Transmission Type | Gear Ratios (:1) | First | Second | Third | Fourth | Fifth | Sixth | Seventh | Eighth | Ninth | Tenth | Reverse | Final Drive Ratio (Standard/Optional) |
| 6L80 6-speed automatic (4.3L, 5.3L w/AFM gas) | 6L80 6-speed | 4.03 | 2.36 | 1.53 | 1.15 | 0.85 | 0.66 | -- | -- | -- | -- | 3.06 | 3.42/-- |
| 8L90 8-speed automatic (2.7L w/DFM gas) | 8L90 8-speed | 4.56 | 2.97 | 2.08 | 1.69 | 1.27 | 1.00 | 0.85 | 0.65 | -- | -- | 3.82 | 3.42/-- |
| 8L90 8-speed automatic (2WD 5.3L w/DFM gas) | 8L90 8-speed | 4.56 | 2.97 | 2.08 | 1.69 | 1.27 | 1.00 | 0.85 | 0.65 | -- | -- | 3.82 | 3.23/3.42 |
| 10L80 10-speed automatic (4WD 5.3L gas, 6.2L gas, 3.0L Turbo Diesel) | 10L80 10-speed | 4.69 | 2.99 | 2.15 | 1.80 | 1.52 | 1.28 | 1.00 | 0.85 | 0.69 | 0.63 | 4.86 | 3.23 diesel/ 3.42 gas |

VEHICLE DIMENSIONS

SIERRA 1500


SELECT SIERRA 1500 CAB DIMENSIONS

CREW CAB

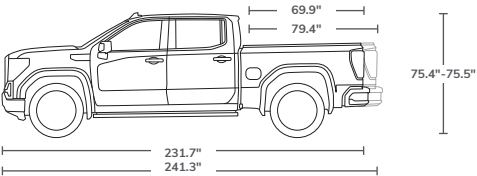

| | |
|--|--------------------------------|
| Sierra Crew Cab comes with either a short or available standard bed. | |
| WHEELBASE | PASSENGER CAPACITY |
| 147.4"-157" | Seating for up to six |
| REAR LEG ROOM | CARGO VOLUME |
| 43.4" | 62.9-71.7 cu. ft. ¹ |
| FRONT HEAD ROOM | FRONT LEG ROOM |
| 43" | 44.5" |


REGULAR CAB

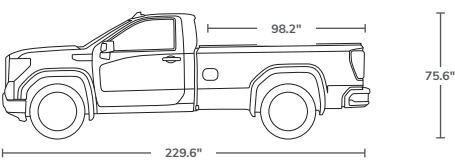

| | |
|---|---------------------------|
| Sierra Regular Cab comes with a long bed. | |
| WHEELBASE | PASSENGER CAPACITY |
| 139.6" | Seating for up to three |
| FRONT SHOULDER ROOM | CARGO VOLUME |
| 66.1" | 89.1 cu. ft. ¹ |
| FRONT HEAD ROOM | FRONT LEG ROOM |
| 43.1" | 44.5" |

¹Cargo and load capacity limited by weight and distribution.

DOUBLE CAB

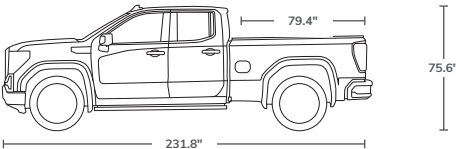

| | |
|--|---------------------------|
| Sierra Double Cab models come with a standard bed. | |
| WHEELBASE | PASSENGER CAPACITY |
| 147.4" | Seating for up to six |
| REAR LEG ROOM | CARGO VOLUME |
| 35.2" | 71.7 cu. ft. ¹ |
| FRONT HEAD ROOM | FRONT LEG ROOM |
| 43" | 44.5" |



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 17

2020 CANYON



OVERVIEW CANYON

GMC | 18



KEY TRAILERING FEATURES

- STABILITRAK WITH TRAILER SWAY CONTROL
- AVAILABLE TOW/HAUL MODE
- AVAILABLE AUTOMATIC LOCKING REAR DIFFERENTIAL
- AVAILABLE DIESEL EXHAUST BRAKE
- AVAILABLE INTEGRATED TRAILER BRAKE CONTROLLER

KEY SPECIFICATIONS

- MAXIMUM CONVENTIONAL TRAILERING 7,700 LBS¹
- MAXIMUM HORSEPOWER 308²
- MAXIMUM TORQUE 369 LB-FT³
- MAXIMUM PAYLOAD 1,609 LBS⁴
- MAXIMUM CARGO VOLUME 49.9 CU. FT.⁵
- MAXIMUM SEATING CAPACITY OF FIVE⁶

POWERTRAIN

- AVAILABLE 3.6L GAS V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 2.8L DURAMAX TURBO DIESEL ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 2.5L 4-CYLINDER GAS ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION

¹7,700-lb rating requires 2WD Canyon SLE Crew Cab model with available Duramax 2.8L I4 Diesel engine, Driver Alert Package, SLE Convenience Package, automatic locking rear differential and Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Requires available 3.6L gas V6 engine. ³Requires available 2.8L Duramax Turbo Diesel engine. ⁴1,609-lb rating requires Base Canyon Crew Cab 2WD model. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁵Requires long bed model. Cargo and load capacity limited by weight and distribution. ⁶Requires Crew Cab model.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA

TERRAIN

TRAILERING CAPABILITY

CANYON

| SPECIFICATIONS | | | | | | |
|---------------------------|-----------------------------------|--------------------------------|--------------------------------|------------|--|-----------------------------------|
| Engine | Cab | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio | Max Conventional Trailer Weight (lbs) ³ | Max Payload (lbs) ⁴ |
| 2.5L I4 | Canyon Crew Cab Short Bed 2WD/4WD | 5,500 | 8,500 | 4.10 | 3,500 | 1,475 |
| | Canyon Extended Cab 2WD | 5,400 | 8,500 | 4.10 | 3,500 | 1,433 |
| | Canyon Extended Cab 4WD | 5,600 | 8,500 | 4.10 | 3,500 | 1,432 |
| 3.6L V6 | Canyon Crew Cab Short Bed 2WD | 5,800 | 12,000 | 3.42 | 7,000 ⁵ | 1,609 |
| | Canyon Crew Cab Short Bed 4WD | 6,000 | 12,000 | 3.42 | 7,000 ⁵ | 1,531 |
| | Canyon Crew Cab Long Bed 4WD | 6,000 | 12,000 | 3.42 | 7,000 ⁵ | 1,475 |
| | Canyon Extended Cab 2WD | 5,700 | 12,000 | 3.42 | 7,000 ⁵ | 1,602 |
| | Canyon Extended Cab 4WD | 5,900 | 12,000 | 3.42 | 7,000 ⁵ | 1,562 |
| 2.8L Duramax Turbo Diesel | Canyon Crew Cab Short Bed 2WD | 6,000 | 12,700 | 3.42 | 7,700 | 1,496 |
| | Canyon Crew Cab Short Bed 4WD | 6,200 | 12,700 | 3.42 | 7,600 | 1,460 |
| | Canyon Crew Cab Long Bed 4WD | 6,200 | 12,700 | 3.42 | 7,550 | 1,398 |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁵Requires available Trailering Package.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

CANYON

| ENGINE SPECIFICATIONS | | | | | | | | |
|---------------------------|-------------------------|----------------|------------------------|-------------------|---|--|------------|------------|
| Engine | Bore & Stroke (in./mm) | Block Material | Cylinder Head Material | Compression Ratio | Valvetrain | Fuel Delivery | Horsepower | Torque |
| 2.5L I4 Gas | 3.46 x 3.97 / 88 x 101 | Cast aluminum | Cast aluminum | 11.3:1 | Dual-overhead camshafts with four valves per cylinder; continuously Variable Valve Timing | High-pressure direct fuel injection with electronic throttle control | 200 @ 6300 | 191 @ 4400 |
| 3.6L Gas V6 | 3.74 x 3.37 / 94 x 85.6 | Cast aluminum | Cast aluminum | 11.5:1 | Dual-overhead camshafts with four valves per cylinder; continuously Variable Valve Timing | High-pressure direct fuel injection with electronic throttle control | 308 @ 6800 | 275 @ 4000 |
| 2.8L Duramax Turbo Diesel | 3.7 x 3.94 / 94 x 100 | Gray cast iron | Cast aluminum | 16.5:1 | Dual-overhead camshafts with four valves per cylinder | Common-rail direct fuel injection | 181 @ 3400 | 369 @ 2000 |

| TRANSMISSION SPECIFICATIONS | | | | | | | | | | | |
|---|------------------|-------|--------|-------|--------|-------|-------|---------|--------|---------|-------------------------|
| Transmission Type | Gear Ratios (:1) | First | Second | Third | Fourth | Fifth | Sixth | Seventh | Eighth | Reverse | Final Drive Ratio |
| 6L50 6-speed automatic (2.5L gas/2.8L Duramax Turbo Diesel) | 6L50 | 4.06 | 2.37 | 1.55 | 1.16 | 0.85 | 0.67 | -- | -- | 3.20 | 4.10 gas 3.42 diesel |
| 8L45 8-speed automatic (3.6L gas) | 8L45 | 4.61 | 3.04 | 2.06 | 1.66 | 1.26 | 1.00 | 0.85 | 0.66 | 3.69 | 3.42 |



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

CANYON

SELECT CANYON DIMENSIONS


CREW CAB

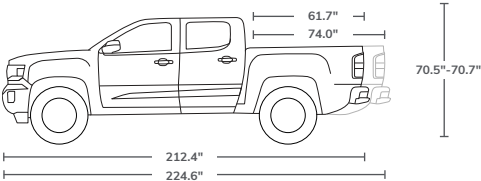

The Canyon Crew Cab model comes in 2WD or 4WD with a short or long bed.

| | |
|---|---|
| CARGO VOLUME 41.3-49.9 cu. ft. ¹ | GVWR 5,400-6,200 lbs ² |
| WHEELBASE 128.3"-140.5" | FRONT/REAR LEG ROOM 45.0"/35.8" |

EXTENDED CAB



The Canyon Extended Cab model comes in 2WD or 4WD with a 6' 2" bed.

| | |
|--|---|
| CARGO VOLUME 49.9 cu. ft. ¹ | GVWR 5,400-5,900 lbs ² |
| WHEELBASE 128.3" | FRONT/REAR LEG ROOM 45.0"/28.6" |

¹Cargo and load capacity limited by weight and distribution. ²Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 22

2020 YUKON AND YUKON XL



OVERVIEW

YUKON AND YUKON XL



KEY TRAILERING FEATURES

- AVAILABLE INTEGRATED TRAILER BRAKE CONTROLLER
- AVAILABLE PREMIUM SMOOTH RIDE SUSPENSION PACKAGE WITH AIR LEVELER

KEY SPECIFICATIONS

- MAXIMUM TRAILERING 8,500 LBS¹ (YUKON)
- MAXIMUM TRAILERING 8,300 LBS¹ (YUKON XL)
- MAXIMUM HORSEPOWER 420²
- MAXIMUM TORQUE 460 LB-FT²
- MAXIMUM PAYLOAD 1,690 LBS³
- MAXIMUM CARGO VOLUME 121.7 CU. FT.⁴
- MAXIMUM SEATING CAPACITY OF NINE⁵

POWERTRAIN

- 5.3L V8 PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.2L V8 PAIRED WITH A 10-SPEED AUTOMATIC TRANSMISSION

¹Requires 2WD model with 5.3L V8 engine and available Heavy-Duty Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Requires available 6.2L V8 engine. ³1,690-lb rating requires short wheelbase 2WD non-Denali model. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁴Requires XL model; behind first row. Cargo and load capacity limited by weight and distribution. ⁵SLE model only.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

YUKON AND YUKON XL

| YUKON SPECIFICATIONS | | | | | |
|----------------------|------------------|-----------------------------|------------|--|--------------------------------|
| Engine | Model | Max GVWR (lbs) ¹ | Axle Ratio | Max Trailer Weight Rating (lbs) ² | Max Payload (lbs) ³ |
| 5.3L V8 | Yukon 2WD | 7,100 | 3.08 | 6,500 | 1,690 |
| | | | 3.42 | 8,500 ⁴ | |
| | Yukon 4WD | 7,300 | 3.08 | 6,300 | 1,650 |
| | | | 3.42 | 8,200 ⁴ | |
| 6.2L V8 | Yukon Denali 2WD | 7,100 | 3.23 | 8,400 | 1,590 |
| | Yukon Denali 4WD | 7,300 | 3.23 | 8,100 | 1,530 |

| YUKON XL SPECIFICATIONS | | | | | |
|-------------------------|---------------------|-----------------------------|------------|--|--------------------------------|
| Engine | Model | Max GVWR (lbs) ¹ | Axle Ratio | Max Trailer Weight Rating (lbs) ² | Max Payload (lbs) ³ |
| 5.3L V8 | Yukon XL 2WD | 7,300 | 3.08 | 6,300 | 1,660 |
| | | | 3.42 | 8,300 ⁴ | |
| | Yukon XL 4WD | 7,500 | 3.08 | 6,000 | 1,630 |
| | | | 3.42 | 8,000 ⁴ | |
| 6.2L V8 | Yukon XL Denali 2WD | 7,300 | 3.23 | 8,100 | 1,610 |
| | Yukon XL Denali 4WD | 7,500 | 3.23 | 7,900 | 1,510 |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁴Requires available Heavy-Duty Trailering Package.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

YUKON AND YUKON XL

| ENGINE SPECIFICATIONS | | | | | | | | |
|-----------------------|---------------------------|----------------|------------------------|-------------------|--|--|------------|------------|
| Engine | Bore & Stroke (in./mm) | Block Material | Cylinder Head Material | Compression Ratio | Valvetrain | Fuel Delivery | Horsepower | Torque |
| 5.3L V8 | 3.78 x 3.62 / 96 x 92 | Cast aluminum | Cast aluminum | 11.0:1 | Overhead valve, two valves per cylinder, Variable Valve Timing | Direct Injection with Active Fuel Management | 355 @ 5600 | 383 @ 4100 |
| 6.2L V8 | 4.06 x 3.62 / 103.25 x 92 | Cast aluminum | Cast aluminum | 11.5:1 | Overhead valve, two valves per cylinder, Variable Valve Timing | Direct Injection with Active Fuel Management | 420 @ 5600 | 460 @ 4100 |

| TRANSMISSION SPECIFICATIONS | | | | | | | | | | | | | |
|---------------------------------|------------------|-------|--------|-------|--------|-------|-------|---------|--------|-------|-------|---------|---------------------------------------|
| Transmission Type | Gear Ratios (:1) | First | Second | Third | Fourth | Fifth | Sixth | Seventh | Eighth | Ninth | Tenth | Reverse | Final Drive Ratio (Standard/Optional) |
| 6L80 6-speed automatic (5.3L) | 6L80 | 4.03 | 2.36 | 1.53 | 1.15 | 0.85 | 0.67 | -- | -- | -- | -- | 3.06 | 3.08/3.42 |
| 10L80 10-speed automatic (6.2L) | 10L80 | 4.69 | 2.98 | 2.14 | 1.77 | 1.52 | 1.27 | 1.00 | 0.85 | 0.69 | 0.63 | 4.86 | 3.23 |



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

YUKON AND YUKON XL

YUKON DIMENSIONS


YUKON

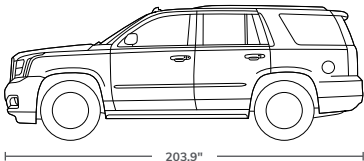

Yukon comes with three rows of seating and is available in either 2WD or 4WD configurations.

| | |
|--|---|
| PASSENGER CAPACITY Seating for up to nine ¹ | FUEL TANK CAPACITY Approx. 26.0 gallons |
| LEG ROOM (FIRST/SECOND/THIRD ROW) 45.3"/39.0"/24.8" | AXLE RATIO 3.08/3.42/3.23 |
| CARGO VOLUME (BEHIND FIRST/SECOND/THIRD ROW) 94.7/51.7/15.3 cu. ft. ² | MAX TRAILERING 8,500 lbs ³ |

YUKON XL

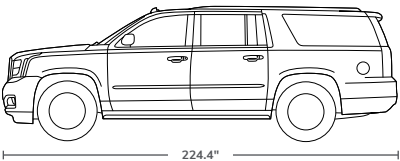

Yukon XL comes with three rows of seating and additional cargo room and is available in either 2WD or 4WD configurations.

| | |
|---|---|
| PASSENGER CAPACITY Seating for up to nine ¹ | FUEL TANK CAPACITY Approx. 31.0 gallons |
| LEG ROOM (FIRST/SECOND/THIRD ROW) 45.3"/39.7"/34.5" | AXLE RATIO 3.08/3.42/3.23 |
| CARGO VOLUME (BEHIND FIRST/SECOND/THIRD ROW) 121.7/76.7/39.3 cu. ft. ² | MAX TRAILERING 8,300 lbs ³ |

¹SLE model only. ²Cargo and load capacity limited by weight and distribution. ³Requires 2WD model with available Heavy-Duty Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 27

2020 ACADIA



OVERVIEW

ACADIA



KEY TRAILERING FEATURE

- AVAILABLE HITCH GUIDANCE WITH HITCH VIEW¹

KEY SPECIFICATIONS

- MAXIMUM TRAILERING 4,000 LBS²
- MAXIMUM HORSEPOWER 310³
- MAXIMUM TORQUE 271 LB-FT³
- MAXIMUM CARGO VOLUME 79.0 CU. FT.⁴
- MAXIMUM SEATING CAPACITY OF UP TO SEVEN

POWERTRAIN

- AVAILABLE NEW 2.0L TURBO
- AVAILABLE 3.6L V6 ENGINE
- 2.5L ENGINE

¹Read the vehicle Owner's Manual for important feature limitations and information. ²Requires available 3.6L V6 engine and Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³Requires available 3.6L V6 engine. ⁴Behind first row. Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

ACADIA

| SPECIFICATIONS | | | | |
|----------------|--------------------|-----------------------------|------------|--|
| Engine | Model | Max GVWR (lbs) ¹ | Axle Ratio | Max Trailer Weight Rating (lbs) ² |
| 2.5L I4 | SL/SLE FWD | 6,001 | 3.80 | 1,000 |
| 2.0L Turbo I4 | SLE AWD/SLT | 6,001 | 3.47 | 1,500 |
| 3.6L V6 | SLE/SLT/AT4/Denali | 6,001 | 3.49 | 4,000 ³ |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³Requires available Trailering Package.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

ACADIA

| ENGINE SPECIFICATIONS | | | | | | | | |
|-----------------------|-------------------------|---|-------------------------|-------------------|---|---|------------|-----------------|
| Engine | Bore & Stroke (in./mm) | Block Material | Cylinder Head Material | Compression Ratio | Valvetrain | Fuel Delivery | Horsepower | Torque |
| 2.5L I4 | 3.46 x 3.97 / 88 x 101 | Lost foam cast aluminum | Lost foam cast aluminum | 11.3:1 | Dual overhead camshafts, four valves per cylinder, continuously Variable Valve Timing | Direct Injection with electronic throttle control | 193 @ 6300 | 188 @ 4400 |
| 2.0L Turbo I4 | 3.26 x 3.63 / 83 x 92.3 | Cast aluminum | Cast aluminum | 10:1 | Dual overhead camshafts, four valves per cylinder with tri-power system | Direct Injection with electronic throttle control | 230 @ 5000 | 258 @ 1500-4000 |
| 3.6L V6 | 3.74 x 3.37 / 95 x 85.8 | Cast aluminum with cast-in-place iron bore liners | Cast aluminum | 11.5:1 | Dual overhead camshafts, four valves per cylinder, continuously Variable Valve Timing | Direct Injection with electronic throttle control | 310 @ 6600 | 271 @ 5000 |

| TRANSMISSION SPECIFICATIONS | | | | | | | | | | | | |
|-------------------------------|------------------|-------|--------|-------|--------|-------|-------|---------|--------|-------|---------|-------------------|
| Transmission Type | Gear Ratios (:1) | First | Second | Third | Fourth | Fifth | Sixth | Seventh | Eighth | Ninth | Reverse | Final Drive Ratio |
| 9T50 9-speed automatic (2.5L) | 10:1 | 4.69 | 3.31 | 3.01 | 2.45 | 1.92 | 1.45 | 1.00 | 0.75 | 0.62 | 2.96 | 3.80 |
| 9T60 9-speed automatic (2.0L) | 10:1 | 4.69 | 3.31 | 3.01 | 2.45 | 1.92 | 1.45 | 1.00 | 0.75 | 0.62 | 2.96 | 3.47 |
| 9T65 9-speed automatic (3.6L) | 10:1 | 4.69 | 3.31 | 3.01 | 2.45 | 1.92 | 1.45 | 1.00 | 0.75 | 0.62 | 2.96 | 3.49 |



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

ACADIA

ACADIA DIMENSIONS

ACADIA

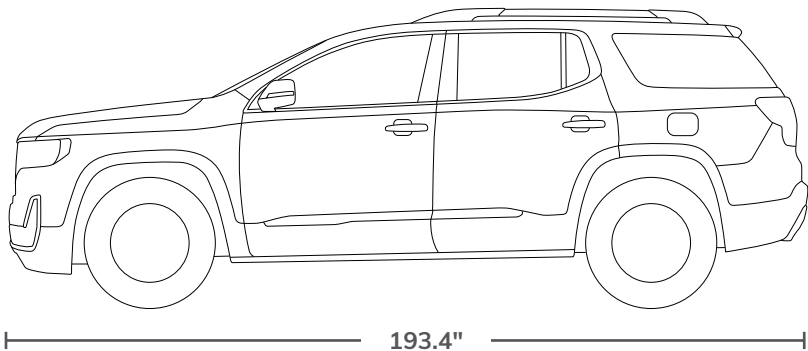

66.7"

193.4"

| | |
|---|---|
| BASE CURB WEIGHT 3,923 lbs | CARGO VOLUME (BEHIND FIRST/SECOND/ THIRD ROW) 79.0/41.7/12.8 cu. ft. ² |
| PASSENGER CAPACITY Seating for up to seven | LEG ROOM (FIRST/SECOND/THIRD ROW) 41.0"/39.7"/29.7" |
| HEAD ROOM (FIRST/SECOND/THIRD ROW) 40.0"/39.6"/37.2" | FUEL TANK CAPACITY (FWD/AWD) Approx. 19.0/22.0 gallons |
| MAX TRAILERING 4,000 lbs ¹ | |

¹Requires available 3.6L engine and Trailering Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 32

2020 TERRAIN



OVERVIEW

TERRAIN



KEY SPECIFICATIONS

- MAXIMUM TRAILERING 3,500 LBS¹
- MAXIMUM HORSEPOWER 252²
- AVAILABLE MAXIMUM TORQUE 260 LB-FT²
- MAXIMUM CARGO VOLUME 63.3 CU. FT.³
- MAXIMUM SEATING CAPACITY OF FIVE

POWERTRAIN

- 1.5L TURBO ENGINE
- AVAILABLE 2.0L TURBO ENGINE

¹Requires available 2.0L engine and trailering equipment. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Requires available 2.0L engine. ³Behind first row. Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY AND POWERTRAIN SPECIFICATIONS

TERRAIN

| SPECIFICATIONS | | | | |
|----------------|----------------|-----------------------------|------------|--|
| Engine | Model | Max GVWR (lbs) ¹ | Axle Ratio | Max Trailer Weight Rating (lbs) ² |
| 1.5L Turbo I4 | SL/SLE/SLT FWD | 4,464 | 3.47 | 1,500 |
| | SLE/SLT AWD | 4,630 | 3.47 | 1,500 |
| 2.0L Turbo I4 | SLT/DENALI FWD | 4,630 | 3.17 | 3,500 ³ |
| | SLT/DENALI AWD | 4,850 | 3.17 | 3,500 ³ |

| ENGINE SPECIFICATIONS | | | | | | | | |
|-----------------------|----------------------------|----------------|------------------------|-------------------|---|------------------|------------|-----------------|
| Engine | Bore & Stroke (in./mm) | Block Material | Cylinder Head Material | Compression Ratio | Valvetrain | Fuel Delivery | Horsepower | Torque |
| 1.5L Turbo I4 | 2.93 x 3.409 (74.4 x 86.6) | Cast aluminum | Cast aluminum | 10.0:1 | Dual overhead camshafts; four valves per cylinder | Direct Injection | 170 @ 5600 | 203 @ 2000-4000 |
| 2.0L Turbo I4 | 3.38 x 3.38 (85.9 x 85.9) | Cast aluminum | Cast aluminum | 9.5:1 | Dual overhead camshafts; four valves per cylinder | Direct Injection | 252 @ 5500 | 260 @ 2500-4500 |

| TRANSMISSION SPECIFICATIONS | | | | | | | | | | | | |
|-------------------------------|------------------|-------|--------|-------|--------|-------|-------|---------|--------|-------|---------|-------------------|
| Transmission Type | Gear Ratios (:1) | First | Second | Third | Fourth | Fifth | Sixth | Seventh | Eighth | Ninth | Reverse | Final Drive Ratio |
| 9T45 9-speed automatic (1.5L) | 9T45 | 4.69 | 3.31 | 3.01 | 2.44 | 1.92 | 1.44 | 1.00 | 0.75 | 0.62 | 2.96 | 3.47 |
| 9T50 9-speed automatic (2.0L) | 9T50 | 4.69 | 3.31 | 3.01 | 2.44 | 1.92 | 1.44 | 1.00 | 0.75 | 0.62 | 2.96 | 3.17 |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³Requires available trailering equipment.



VEHICLE COMPARISON



TECHNOLOGY




TERMINOLOGY

VEHICLE DIMENSIONS

TERRAIN

TERRAIN DIMENSIONS

TERRAIN

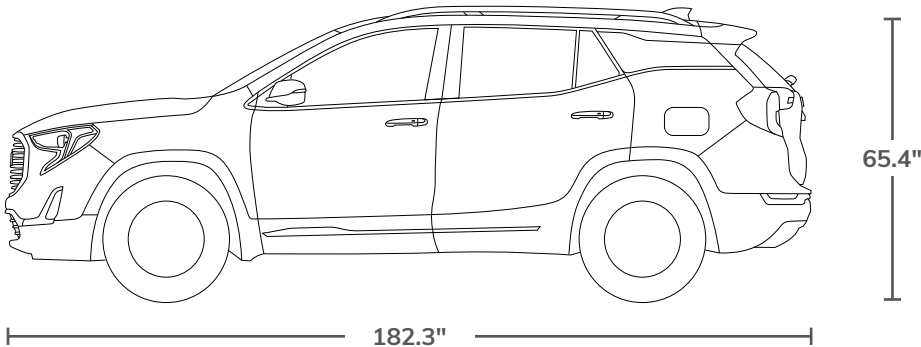

| | | |
|---|--|---|
| BASE CURB WEIGHT 3,449 lbs | MAX TRAILERING 3,500 lbs ¹ | LEG ROOM (FIRST/SECOND ROW) 40.9"/39.7" |
| PASSENGER CAPACITY Seating for up to five | CARGO VOLUME (BEHIND FIRST/SECOND ROW) 63.3/29.6 cu. ft. ² | FUEL TANK CAPACITY (FWD/AWD) Approx. 14.9/15.6 gallons |
| HEAD ROOM (FIRST/SECOND ROW) 40.0"/38.5" | | |

¹Requires available 2.0L engine and trailering equipment. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ²Cargo and load capacity limited by weight and distribution.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

GMC | 36

2020 SAVANA



OVERVIEW

SAVANA CARGO VAN

GMC | 37



KEY TRAILERING FEATURES

- 31-GALLON (APPROX.) FUEL TANK CAPACITY
- TAP-UP/TAP-DOWN SHIFT CONTROL AND AUTO GRADE BRAKING TO AUTOMATICALLY SLOW THE VEHICLE WHILE DESCENDING LONG, STEEP GRADES
- FULL LADDER-TYPE FRAME DESIGN FOR STRENGTH AND DURABILITY

KEY SPECIFICATIONS

- MAXIMUM CARGO VOLUME 283.6 CU. FT.¹
- AVAILABLE MAXIMUM SEATING CAPACITY OF FIVE²
- MAXIMUM TRAILERING 10,000 LBS³
- MAXIMUM GCWR 16,000 LBS⁴

POWERTRAIN

- AVAILABLE 6.0L V8 VORTEC ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 2.8L DURAMAX TURBO DIESEL 4-CYLINDER ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.0L V8 GASEOUS CNG/LPG-CAPABLE ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION

¹Requires extended wheelbase model. Cargo and load capacity limited by weight and distribution. ²Requires available Savana Crew Van Package and swing-out rear side door window glass. ³10,000-lb trailer rating requires the available 6.0L V8 engine and Trailing Equipment Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴16,000-lb GCWR requires the available 6.0L V8 engine and Trailing Equipment Package. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

SAVANA CARGO VAN

GMC | 38

SAVANA 2500 SPECIFICATIONS

| Engine | Model | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio | Max Trailer Weight Rating (lbs) ³ | Max Payload (lbs) ⁴ |
|---|------------------------|-----------------------------|-----------------------------|------------|--|--------------------------------|
| 4.3L V6 | Regular Wheelbase RWD | 8,600 | 13,000 | 3.42 | 7,400 | 3,280 |
| | Extended Wheelbase RWD | 8,600 | 13,000 | 3.42 | 7,100 | 3,060 |
| Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas | Regular Wheelbase RWD | 8,600 | 16,000 | 3.42 | 10,000 | 3,050 |
| | Extended Wheelbase RWD | 8,600 | 16,000 | 3.42 | 10,000 | 2,820 |
| 2.8L Duramax Turbo Diesel | Regular Wheelbase RWD | 8,600 | 13,000 | 3.42 | 7,000 | 2,850 |
| | Extended Wheelbase RWD | 8,600 | 13,000 | 3.42 | 6,100 | 2,640 |

SAVANA 3500 SPECIFICATIONS

| Engine | Model | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio | Max Trailer Weight Rating (lbs) ³ | Max Payload (lbs) ⁴ |
|---|------------------------|-----------------------------|-----------------------------|------------|--|--------------------------------|
| 4.3L V6 | Regular Wheelbase RWD | 9,600 | 13,000 | 3.42 | 7,400 | 4,250 |
| | Extended Wheelbase RWD | 9,600 | 13,000 | 3.42 | 7,200 | 4,060 |
| Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas | Regular Wheelbase RWD | 9,600 | 16,000 | 3.42 | 10,000 | 4,020 |
| | Extended Wheelbase RWD | 9,600 | 16,000 | 3.42 | 10,000 | 3,820 |
| 2.8L Duramax Turbo Diesel | Regular Wheelbase RWD | 9,600 | 13,000 | 3.42 | 6,200 | 3,820 |
| | Extended Wheelbase RWD | 9,600 | 13,000 | 3.42 | 6,000 | 3,930 |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA

TERRAIN

OVERVIEW

2020 SAVANA PASSENGER VAN

GMC | 39



KEY TRAILERING FEATURES

- 31-GALLON (APPROX.) FUEL TANK CAPACITY
- TAP-UP/TAP-DOWN SHIFT CONTROL AND AUTO GRADE BRAKING TO AUTOMATICALLY SLOW THE VEHICLE WHILE DESCENDING LONG, STEEP GRADES
- FULL LADDER-TYPE FRAME DESIGN FOR STRENGTH AND DURABILITY

KEY SPECIFICATIONS

- MAXIMUM SEATING CAPACITY OF 15¹
- MAXIMUM CONVENTIONAL TRAILERING 9,600 LBS²
- MAXIMUM GCWR 16,000 LBS³

POWERTRAIN

- AVAILABLE 6.0L V8 VORTEC ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 2.8L DURAMAX TURBO DIESEL 4-CYLINDER ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.0L V8 GASEOUS CNG/LPG-CAPABLE ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION

¹Requires extended wheelbase model and available 15-passenger seating configuration. ²9,600-lb trailer rating requires regular wheelbase model, available 6.0L V8 engine and Trailering Equipment Package. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ³16,000-lb GCWR requires the available 6.0L V8 engine and Trailering Equipment Package. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

SAVANA PASSENGER VAN

GMC | 40

SAVANA 2500 SPECIFICATIONS

| Engine | Model | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio | Max Trailer Weight Rating (lbs) ³ | Max Payload (lbs) ⁴ |
|---|-----------------------|-----------------------------|-----------------------------|------------|--|--------------------------------|
| 4.3L V6 | Regular Wheelbase RWD | 8,600 | 13,000 | 3.42 | 6,700 | 2,550 |
| Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas | Regular Wheelbase RWD | 8,600 | 16,000 | 3.42 | 9,600 | 2,390 |
| 2.8L Duramax Turbo Diesel | Regular Wheelbase RWD | 8,600 | 13,000 | 3.42 | 6,300 | 2,200 |

SAVANA 3500 SPECIFICATIONS

| Engine | Model | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio | Max Trailer Weight Rating (lbs) ³ | Max Payload (lbs) ⁴ |
|---|------------------------|-----------------------------|-----------------------------|------------|--|--------------------------------|
| 4.3L V6 | Regular Wheelbase RWD | 9,600 | 13,000 | 3.42 | 6,700 | 3,550 |
| | Extended Wheelbase RWD | 9,600 | 13,000 | 3.42 | 6,300 | 3,210 |
| Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gas | Regular Wheelbase RWD | 9,600 | 16,000 | 3.42 | 9,600 | 3,390 |
| | Extended Wheelbase RWD | 9,600 | 16,000 | 3.42 | 9,200 | 3,050 |
| 2.8L Duramax Turbo Diesel | Regular Wheelbase RWD | 9,600 | 13,000 | 3.42 | 5,700 | 3,200 |
| | Extended Wheelbase RWD | 9,600 | 13,000 | 3.42 | 5,300 | 3,170 |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³Requires properly equipped vehicle. Before you buy a vehicle or use it for trailering, carefully review the trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ⁴These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA

TERRAIN

POWERTRAIN SPECIFICATIONS

SAVANA CARGO/PASSENGER VANS

| ENGINE SPECIFICATIONS | | | | | | | | |
|-----------------------|---------------------------|----------------|------------------------|-------------------|---|-----------------------------------|------------|------------|
| Engine | Bore & Stroke (in./mm) | Block Material | Cylinder Head Material | Compression Ratio | Valvetrain | Fuel Delivery | Horsepower | Torque |
| 4.3L V6 Gasoline | 3.92 x 3.62 / 99.6 x 91.9 | Aluminum | Aluminum | 11.0:1 | Overhead valve, two valves per cylinder | Sequential fuel injection | 276 @ 5200 | 298 @ 3900 |
| 6.0L V8 Gasoline | 4.4 x 3.62 / 111.8 x 91.9 | Cast iron | Cast aluminum | 9.6:1 | Overhead valve, two valves per cylinder | Sequential fuel injection | 324 @ 4700 | 373 @ 4400 |
| 6.0L V8 Gaseous | 4 x 3.662 / 101.6 x 92 | Cast iron | Cast aluminum | 9.7:1 | Overhead valve, two valves per cylinder | Sequential fuel injection | 282 @ 4800 | 320 @ 4400 |
| 2.8L Turbo Diesel | 3.7 x 3.937 / 94 x 100 | Gray cast iron | Aluminum | 16.5:1 | Dual overhead camshafts with four valves per cylinder | Common-rail direct fuel injection | 181 @ 3400 | 369 @ 2000 |

| TRANSMISSION SPECIFICATIONS | | | | | | | | | | | |
|---|------------------|-------|--------|-------|--------|-------|-------|---------|--------|---------|-------------------|
| Transmission Type | Gear Ratios (:1) | First | Second | Third | Fourth | Fifth | Sixth | Seventh | Eighth | Reverse | Final Drive Ratio |
| 6L90 6-speed automatic (6.0L gas/gaseous) | 6L90 | 4.03 | 2.36 | 1.53 | 1.15 | 0.85 | 0.67 | -- | -- | 3.06 | 3.42 |
| 8L90 8-speed automatic (4.3L gas) | 8L90 | 4.56 | 2.97 | 2.08 | 1.69 | 1.27 | 1.00 | 0.85 | 0.65 | 3.82 | 3.42 |
| 8-speed automatic with diesel-specific torque converter (2.8L Turbo Diesel) | 8L90 | 4.56 | 2.97 | 2.08 | 1.69 | 1.27 | 1.00 | 0.85 | 0.65 | 3.82 | 3.42 |



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

OVERVIEW

SAVANA CUTAWAY

GMC | 42



KEY FEATURES

- 33-GALLON (APPROX.) FUEL TANK CAPACITY
- TAP-UP/TAP-DOWN SHIFT CONTROL AND AUTO GRADE BRAKING TO AUTOMATICALLY SLOW THE VEHICLE WHILE DESCENDING LONG, STEEP GRADES

KEY SPECIFICATIONS

- MAXIMUM SEATING CAPACITY OF TWO
- MAXIMUM PAYLOAD 8,940 LBS¹
- MAXIMUM GVWR 14,200 LBS²
- MAXIMUM FUEL TANK CAPACITY UP TO APPROXIMATELY 57 GALLONS³
- MAXIMUM GCWR 20,000 LBS⁴

POWERTRAIN

- AVAILABLE 6.0L V8 VORTEC ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- AVAILABLE 6.0L V8 GASEOUS CNG/LPG-CAPABLE ENGINE PAIRED WITH A 6-SPEED AUTOMATIC TRANSMISSION
- 4.3L V6 ENGINE PAIRED WITH AN 8-SPEED AUTOMATIC TRANSMISSION

¹Requires properly equipped 4500 Series 159" wheelbase model with 6.0L gas V8 engine. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ²Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ³Available feature. See gmc.com or your dealer for more availability details. ⁴Requires 4500 Series model. Gross Combination Weight Rating (GCWR) includes the weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING CAPABILITY

SAVANA CUTAWAY

| SAVANA 3500 SPECIFICATIONS | | | | | |
|---|----------------|-----------------------------|-----------------------------|-------------------|--------------------------------|
| Engine | Model | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio | Max Payload (lbs) ³ |
| 4.3L V6 | 139" Wheelbase | 10,100 | 13,000 | 3.42 ⁴ | 2,500 |
| | | | | 3.73 ⁵ | |
| | 159" Wheelbase | 9,900 | 13,000 | 3.42 ⁴ | 5,270 |
| | | | | 3.73 ⁵ | |
| Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gaseous | 139" Wheelbase | 12,300 | 16,000 | 3.42 | 5,150 |
| | | | | 3.73 ⁵ | |
| | 159" Wheelbase | 12,300 | 16,000 | 3.42 | 5,090 |
| | | | | 3.73 ⁵ | |
| | 177" Wheelbase | 12,300 | 16,000 | 3.73 ⁵ | 7,080 |

| SAVANA 4500 SPECIFICATIONS | | | | | |
|---|----------------|-----------------------------|-----------------------------|------------|--------------------------------|
| Engine | Model | Max GVWR (lbs) ¹ | Max GCWR (lbs) ² | Axle Ratio | Max Payload (lbs) ³ |
| Vortec 6.0L V8 FlexFuel/ 6.0L V8 Gaseous | 159" Wheelbase | 14,200 | 20,000 | 4.10 | 8,940 |
| | 177" Wheelbase | 14,200 | 20,000 | 4.10 | 8,860 |

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²Gross Combination Weight Rating (GCWR). When properly equipped; includes weight of vehicle and trailer combination, including the weight of driver, passengers, fuel, optional equipment and cargo in the vehicle and trailer. ³These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb. ⁴Requires single-rear-wheel configuration. ⁵Requires dual-rear-wheel configuration.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

POWERTRAIN SPECIFICATIONS

SAVANA CUTAWAY

| ENGINE SPECIFICATIONS | | | | | | | | |
|-----------------------|---------------------------|----------------|------------------------|-------------------|---|---------------------------|------------|------------|
| Engine | Bore & Stroke (in./mm) | Block Material | Cylinder Head Material | Compression Ratio | Valvetrain | Fuel Delivery | Horsepower | Torque |
| 4.3L Gas V6 | 3.92 x 3.62 / 99.6 x 91.9 | Aluminum | Aluminum | 11.0:1 | Overhead valve, two valves per cylinder | Sequential fuel injection | 276 @ 5200 | 298 @ 3900 |
| 6.0L Gas V8 | 4.4 x 3.62 / 111.8 x 91.9 | Cast iron | Cast aluminum | 9.6:1 | Overhead valve, two valves per cylinder | Sequential fuel injection | 341 @ 5400 | 373 @ 4200 |
| 6.0L Gas V8 | 4 x 3.662 / 101.6 x 92 | Cast iron | Cast aluminum | 9.7:1 | Overhead valve, two valves per cylinder | Sequential fuel injection | 341 @ 5400 | 373 @ 4200 |

| TRANSMISSION SPECIFICATIONS | | | | | | | | | | | |
|-----------------------------------|------------------|-------|--------|-------|--------|-------|-------|---------|--------|---------|---|
| Transmission Type | Gear Ratios (-1) | First | Second | Third | Fourth | Fifth | Sixth | Seventh | Eighth | Reverse | Final Drive Ratio |
| 6L90 6-speed automatic (6.0L gas) | 6L90 | 4.03 | 2.36 | 1.53 | 1.15 | 0.85 | 0.67 | -- | -- | 3.06 | 3.42 ¹ /3.73 ² /4.10 ³ |
| 8L90 8-speed automatic (4.3L gas) | 8L90 | 4.56 | 2.97 | 2.08 | 1.69 | 1.27 | 1.00 | 0.85 | 0.65 | 3.82 | 3.42 |


¹3.42 ratio requires single-rear-wheel configuration. ²3.73 ratio requires dual-rear-wheel configuration. ³4.10 ratio requires dual-rear-wheel configuration. See your dealer for more availability details.

VEHICLE DIMENSIONS

SAVANA VAN

SAVANA VEHICLE DIMENSIONS

SAVANA 2500 CARGO

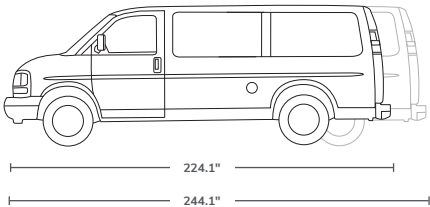


The Savana 2500 Cargo Van offers a regular or extended wheelbase.

MAX GVWR
8,600 lbs¹

MAX PAYLOAD
3,280 lbs² (regular);
3,060 lbs² (extended)

FUEL TANK CAPACITY
Approx. 31 gallons

SAVANA 2500 PASSENGER

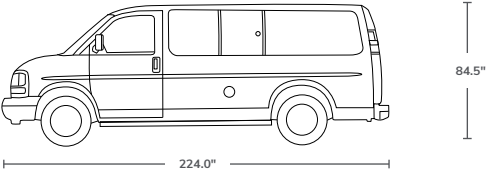


The Savana 2500 Passenger Van offers a regular wheelbase.

MAX GVWR
8,600 lbs¹

MAX PAYLOAD
2,550 lbs²

FUEL TANK CAPACITY
Approx. 31 gallons

SAVANA 3500 CARGO

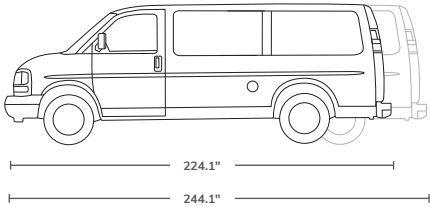


The Savana 3500 Cargo Van offers more payload than the 2500 and comes with a regular or extended wheelbase.

MAX GVWR
9,900 lbs¹

MAX PAYLOAD
4,250 lbs² (regular);
4,060 lbs² (extended)

FUEL TANK CAPACITY
Approx. 31 gallons

SAVANA 3500 PASSENGER

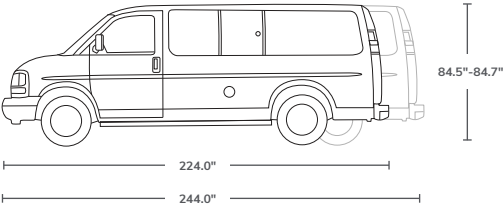


The Savana 3500 Passenger Van offers more payload than the 2500 and comes with a regular or extended wheelbase.

MAX GVWR
9,900 lbs¹

MAX PAYLOAD
3,550 lbs² (regular);
3,210 lbs² (extended)

FUEL TANK CAPACITY
Approx. 31 gallons

SAVANA CUTAWAY

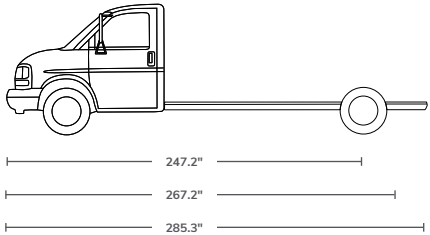

The Savana Cutaway comes with a choice of three wheelbases—139", 159" and 177".

MAX GVWR
9,900-14,200 lbs¹

MAX REAR GAWR
6,084-7,600 lbs

MAX FRONT GAWR
4,100-4,600 lbs

FUEL TANK CAPACITY
Approx. 33 gallons (standard)
Approx. 57 gallons (available)

¹Maximum Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ²These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's doorjamb.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING TECHNOLOGY



TRAILERING TECHNOLOGY

CAMERA SYSTEM

GMC | 47

UP TO 15 AVAILABLE CAMERA VIEWS Trailering is all about confidence. Assurance that everything is operating as it should, every step of the journey. In the Next Generation Sierra Heavy Duty and Sierra 1500, that faith starts with the available ProGrade Trailering System and the views it offers—you can have up to 15 camera views¹ when equipped with the available Technology Package and accessory cameras and installation. It helps when hooking up your trailer, while on the road and when backing your trailer into place. One of those views is the industry-first available transparent trailer view, which helps you to virtually see right through the trailer to detect objects behind it.

- | | | | | | |
|----------------------------|---------------------|-----------------------|---|------------------------|---------------------------------|
| 1 TRANSPARENT TRAILER VIEW | 4 FRONT CAMERA VIEW | 7 FRONT TOP-DOWN VIEW | 10 FRONT SIDE VIEW | 12 REAR TRAILER VIEW | 14 PICTURE-IN-PICTURE SIDE VIEW |
| 2 HITCH VIEW | 5 REAR CAMERA VIEW | 8 REAR TOP-DOWN VIEW | 11 REAR SIDE VIEW (WITH TRAILER BIASING) | 13 INSIDE TRAILER VIEW | 15 REAR CAMERA MIRROR |
| 3 BED VIEW | 6 SURROUND VIEW | 9 BOWL VIEW | | | |



¹Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details.

Safety or driver-assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. The driver should remain attentive to traffic, surroundings and road conditions at all times. Visibility, weather and road conditions may affect feature performance. Read the vehicle Owner's Manual for more important feature limitations and information.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING TECHNOLOGY HIGHLIGHTS

GMC | 48

PROGRADE TRAILERING SYSTEM GMC's available ProGrade Trailering System on Sierra 1500 and Sierra Heavy Duty models includes advanced technologies for increased views and confidence. It helps when hooking up your trailer, while on the road and when backing your trailer into place.

■ **IN-VEHICLE TRAILERING APP¹** Located on the home screen of the infotainment system,² this innovation offers customized trailer profiles to track and monitor predeparture checklists, trailer electrical diagnostics (detecting shorts in the trailer lighting circuits, for example), trailer tire pressure and temperature status (if equipped),³ a Trailer Light Sequence Test, maintenance reminders and more. The Trailering App will also monitor trailer presence, even while the vehicle is off, by periodically checking the trailer lighting circuits. On trailers equipped with LED lights, these periodic checks may cause the trailer lights to flash. This flashing will become more frequent if Theft Alert is enabled.

■ **myGMC APP⁴** The available myGMC app gives you access to features such as creating and managing trailer profiles (shareable with other compatible Sierra owners), a Trailer Light Sequence Test that provides the ability to remotely activate trailer lights to help ensure they're in working order, predeparture checklists (or create your own) and a Trailer Load Calculator to determine the combined weight of your truck and trailer for a confident towing experience. To monitor trailering health, you can view and receive alerts on key components of your trailer such as tire pressure monitoring³ and trailer miles. There's also a trailering glossary to provide a quick reference to trailering-related materials.

SMART TRAILER INTEGRATION Using the available iN•Command[®] Control System⁵ from ASA Electronics, select GMC vehicles can give drivers control over eligible trailer functions through the myGMC app⁴ or the infotainment system.² Similar to the features of a smart home, iN•Command is the central hub of operations to monitor and control an array of systems in compatible

trailers. You can turn on the trailer's air conditioning or water heater, check water and holding tank levels or monitor fuel levels on trailers equipped with generators.

TRACTION SELECT SYSTEM WITH TOW/HAUL MODE

On select GMC models, this available system allows you to quickly switch to Tow/Haul mode, which adjusts transmission shift points to deliver peak power and trailering performance. On Sierra, the system will retain the Tow/Haul setting configuration for up to 4 hours after it's turned off, eliminating the need to re-engage the system after returning from a brief stop on a long journey.

¹App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. ²Functionality varies by model. Full functionality requires compatible Bluetooth[®] and smartphone, and USB connectivity for some devices. ³Requires available Trailer Tire Pressure Monitoring System and trailer tire pressure monitor sensors. Sensors must be installed by the customer or a third-party service center. ⁴Device data connection required. Available on select Apple[®] and Android[™] devices. Some features require active service plan and working electrical system. Service availability, features and functionality vary by vehicle. ⁵iN•Command is provided by ASA Electronics and is designed to operate within 30 feet of the trailer. Works with trailers equipped with the iN•Command Control System with GlobalConnect via Bluetooth connection. Control and monitoring functionality varies by trailer manufacturer, model and installed options. Use of the iN•Command Control System feature through the myGMC app requires active service plan. User terms apply. See onstar.com for details and limitations.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING TECHNOLOGY AVAILABILITY

GMC | 49

| SELECT TRAILERING TECHNOLOGY AVAILABILITY BY VEHICLE | | | | | | | | | | |
|--|-------------|------------------------|------------------------|--------------------|-----------------|---------|---------|---------|--------|----------------|
| | Sierra 1500 | Sierra 2500 Heavy Duty | Sierra 3500 Heavy Duty | Sierra Chassis Cab | Yukon/ Yukon XL | Canyon | Acadia | Terrain | Savana | Savana Cutaway |
| ● STANDARD ● AVAILABLE — NOT AVAILABLE | | | | | | | | | | |
| In-vehicle Trailering App ¹ | ● | ● | ● | — | — | — | — | — | — | — |
| myGMC app ² | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Smart Trailer Integration | ● | ● | ● | ● | — | — | — | — | — | — |
| Traction Select System with Tow/Haul mode | ● | ● | ● | ● | — | — | ● | ● | — | — |
| Auto Electric Parking Brake | ● | ● | ● | ● | — | — | — | — | — | — |
| Park Grade Hold Assist | — | ● | ● | ● | — | — | — | — | — | — |
| Hill Start Assist | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Diesel Exhaust Brake System | ● | ● | ● | ● | — | ● | — | — | ● | — |
| Diesel Engine After-Run | — | ● | ● | ● | — | — | — | — | — | — |
| Trailering mirrors | ● | ● | ● | ● | — | — | — | — | — | — |
| Integrated Trailer Brake Controller | ● | ● | ● | ● | ● | ● | — | — | — | — |
| Trailer Sway Control | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Transmission temperature gauge | ● | ● | ● | ● | — | ● | — | — | — | — |
| Hitch Guidance ³ | ● | ● | ● | — | — | ● | ● | — | — | — |
| Rear Vision Camera ³ | ● | ● | ● | — | ● | ● | ● | ● | ● | ● |
| High Definition Surround Vision ³ | ● | ● | ● | — | — | — | ● | ● | — | — |
| Trailering Hitch Platform | ● | ● | ● | — | ● | ● | ● | ● | ● | — |
| 7-wire harness with independent fused trailering circuits | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 7-pin and 4-pin connector | ● | ● | ● | — | (7-pin) | (7-pin) | (7-pin) | (7-pin) | ● | — |
| Up to 15 camera views, including transparent trailer view ⁴ | ● | ● | ● | — | — | — | — | — | — | — |

¹App functionality and features vary with vehicle equipment and trim level. Data connection may be required. Some features require active service plan and working electrical system. User terms and limitations apply. ²Device data connection required. Available on select Apple® and Android devices. Some features require active service plan and working electrical system. Service availability, features and functionality vary by vehicle. ³Read the vehicle Owner's Manual for important feature limitations and information. ⁴Read the vehicle Owner's Manual for important feature limitations and information. Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details.

FOR MORE INFORMATION ON THESE TECHNOLOGIES, VISIT [GMC.COM](https://gmc.com)



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

RETURN TO SECTION

SIERRA HEAVY DUTY

SIERRA 1500

SAVANA

YUKON AND YUKON XL

CANYON

ACADIA

TERRAIN

TRAILERING TERMINOLOGY

GMC | 50

CURB WEIGHT: The weight of a vehicle with all of the standard and optional equipment and a full tank of fuel, but without any passengers or cargo.

GROSS VEHICLE WEIGHT (GVW): The combined weight of the vehicle and all passengers and cargo.

GROSS VEHICLE WEIGHT RATING (GVWR):

This number is the maximum amount a tow vehicle may weigh. Everything that contributes to the weight of the tow vehicle is featured in this rating, including the weight of the vehicle, driver and all passengers, fuel, payload, tongue load of the trailer, the weight of the hitch and all optional equipment. The GVWR is displayed on the driver's door or door-lock pillar label of your GMC vehicle. The GVW must never exceed the GVWR.

GROSS COMBINED WEIGHT RATING (GCWR):

The total allowable weight of the completely loaded vehicle and trailer, including any fuel, passengers, cargo, equipment and accessories.

CARGO WEIGHT: The weight of all items added to the curb weight of the vehicle, including cargo and optional equipment. When towing, cargo weight also includes the trailer tongue or kingpin weight.

MAX PAYLOAD: The maximum allowable weight of passengers plus cargo that the vehicle is designed to carry.

GROSS AXLE WEIGHT RATING (GAWR): This is the weight that each axle is capable of supporting. The load on each axle must not exceed the GAWR. The GAWR for each GMC vehicle is displayed on the driver's door or door-lock pillar label.

GROSS AXLE WEIGHT (GAW): The total weight placed on a single axle (front or rear).

GROSS TRAILER WEIGHT: The weight of a loaded trailer.

GROSS COMBINED WEIGHT (GCW): The gross vehicle weight plus the loaded trailer weight.

TONGUE (OR HITCH) WEIGHT: The tongue weight is the total amount of trailer weight that is pressing down on the trailer hitch. Keep in mind that the way a trailer is loaded affects the overall tongue weight and will also affect the handling of the tow vehicle when trailering.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY


TRAILER HITCH TYPES




HITCH BALL ON STEP BUMPER




HITCH BALL ON DRAW BAR



WEIGHT-DISTRIBUTING HITCH



FIFTH-WHEEL HITCH



GOOSENECK HITCH

SELECTING THE RIGHT HITCH Choosing the right hitch and making the proper electrical connections affect how your vehicle handles, corners and brakes, and allow you to alert other drivers of your intentions. Before selecting a hitch or trailering package, you should be familiar with the weight ratings specific to your GMC vehicle.

WEIGHT-CARRYING HITCH This consists of a hitch ball mounted on a step bumper or draw bar, or a tow eye latched to a pintle hook. Hitch balls are available in a range of sizes. Make sure that the diameter of your hitch ball matches your trailer coupler. Also check that the ball and ball mount meet or exceed the Gross Trailer Weight Rating.

WEIGHT-DISTRIBUTING HITCH This is most often used for heavier trailering. This hitch type more evenly distributes the trailer load by using spring bars to shift some of the hitch weight forward onto the tow vehicle's front axle and rearward to the trailer's axles.

FIFTH-WHEEL HITCH AND GOOSENECK HITCH These are designed for heavy trailering. Located in the bed of the truck, these hitch types are most frequently used with travel trailers, horse trailers and other large trailers.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

TRAILERING ON THE ROAD

TRAILER TYPES

GMC | 52



CONVENTIONAL TRAILER While typically used to describe recreational trailers, like campers or boat trailers, conventional trailers generally utilize a ball-type hitch.



FIFTH-WHEEL TRAILER Fifth-wheel trailers can be slightly larger than conventional trailers and offer a wide range of configurations. These trailers are designed specifically for pickups equipped with a fifth-wheel hitch.



GOOSENECK TRAILER Gooseneck trailers place the hitch weight of the trailer over the rear axle of the truck rather than the rear bumper.



VEHICLE COMPARISON




TECHNOLOGY



TERMINOLOGY

TRAILERING INFORMATION LABEL

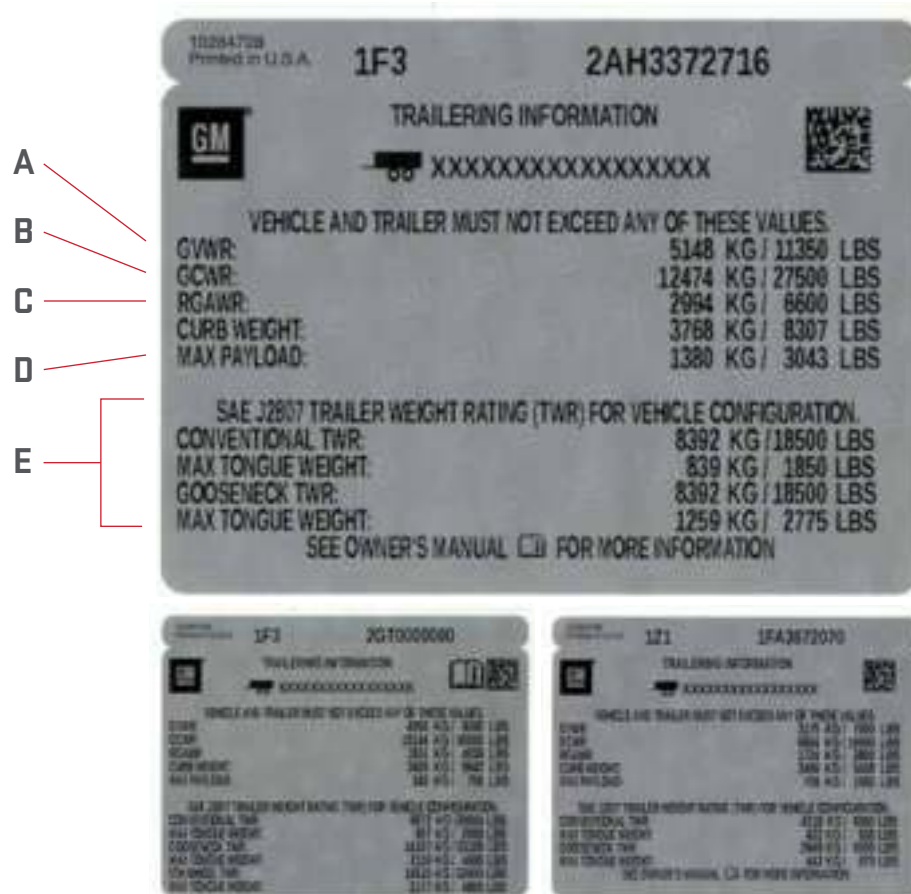

Included on all Sierra 1500 and Sierra Heavy Duty models is a Trailing Information label.

A GVWR = Gross Vehicle Weight Rating

This number is the maximum amount a tow vehicle may weigh. Everything that contributes to the weight of the tow vehicle is featured in this rating, including the weight of the vehicle, driver and all passengers, fuel, payload, tongue load of the trailer, the weight of the hitch and all optional equipment. The GVWR is displayed on the driver's door or door-lock pillar label of your GMC vehicle. The Gross Vehicle Weight must never exceed the GVWR.

B GCWR = Gross Combined Weight Rating

The total allowable weight of the completely loaded vehicle and trailer, including any fuel, passengers, cargo, equipment and accessories.

C RGAWR = Rear Gross Axle Weight Rating

This is the weight that the rear axle is capable of supporting. The load on the axle must not exceed the RGAWR. The RGAWR for each GMC vehicle is displayed on the driver's door or door-lock pillar label.

D Max Payload

The maximum allowable weight of passengers plus cargo that the vehicle is designed to carry.

E TWR = Trailer Weight Rating

This section of the label provides the ratings for your vehicle's specific configuration.



VEHICLE COMPARISON



TECHNOLOGY



TERMINOLOGY

LIVE LIKE A PRO

TRAILERING WITH YOUR GMC GMC vehicles are built to be strong and durable to handle the demands of trailering. For available trailering-related equipment, talk to your dealer. You'll need a hitch, of course, and a wide selection of hitch types is available, either as factory equipment or from your dealer. In addition, if you plan to tow frequently, you should consider equipping your GMC vehicle with an available Trailering Package. See your GMC dealer or gmc.com for model-specific package details and equipment. Please carefully review your GMC Owner's Manual for important safety information about trailering with your vehicle.

A WORD ABOUT THIS GUIDE We have tried to make this guide comprehensive and factual. We reserve the right, however, to make changes at any time and without notice, in prices, colors, materials, equipment, specifications, models and availability. Information may have been updated since the time of publication. Please check with your GMC sales professional for complete details. GMC reserves the right to lengthen or shorten the model year for any product for any reason, or to start and end model years at different times. GMC vehicles are equipped with engines produced by different operating units of General Motors, its subsidiaries or suppliers to General Motors worldwide. All competitive claims are based on the latest information available at the time of publication.

©2020 General Motors. All rights reserved. GM, the GM logo, GMC, and the slogans, emblems, vehicle model names, vehicle body designs and other marks appearing in this guide are the trademarks and/or service marks of General Motors, its subsidiaries, affiliates and licensors.



WE ARE PROFESSIONAL GRADE



GMC.COM